음족

景 锁

が 回

喜柱 频频

画

品 粮

D连

西京杆

召赞

で面

っ板

点锁

告扣

板。

较 2

链豆

磁图

件音







材 源: SUS不例则

表面处理:SUS拉丝 關光 结构功能:外面式阴禁拉手、通过重丝固定。安善拆

即简易方便,把手置大承重50kg

巡:一般返用于机制、机相、机械、机床、工 具層。型材框架等版金设备值体使用 注: 透用门板厚度1-3mm



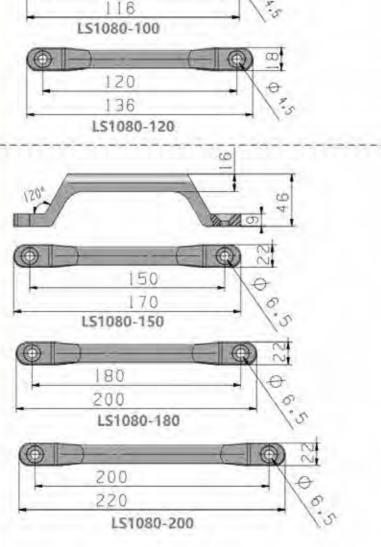

LS1080-80

100

Feature Description:

Material: SUS stainless steel


Surface treatment: SUS brushed, mirror light

Structural function: exposed hidden handle, fixed by screws, easy to install and disassemble, the maximum load of the handle is 50kg

Uses:Generally suitable for chassis, cabinets, electrical boxes, machinery, machine tools, instrumentation, testing equipment and other sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

电话: 13929897256 邮箱: 526202547@qq.com



Feature Description:


Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, silver, SUS brushed, mirror light

Structural function: exposed hidden handle, fixed by screws, easy to install and disassemble, the maximum load of the handle is 50kg

Uses:Generally suitable for chassis, cabinets, electrical boxes, machinery, machine tools, instrumentation, testing equipment and other sheet

Remarks: Applicable door panel thickness 1-3mm





Feature Description:

Material: SUS stainless steel

Surface treatment: SUS brushed, mirror light

Structural function: exposed hidden handle, fixed by screws, easy to install and disassemble, the maximum load of the handle is 50kg

Uses: Generally suitable for chassis, cabinets, electrical boxes, machinery, machine tools, instrumentation, testing equipment and other sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm



特征说明:

材 责: ZDC综合金/SUS不管师

·表面处理:ZDC顺色、假色、SUS拉丝、情光

结构功能:外篇式明読拉手,國位即绘画定,安發折 即而易方便。尼李能太承担50kg

读:一般适用于机和。机柜、机械、机床、工 **員**着,型材框架等版金设备循体使用

着 注: 适用门板厚度 1-3mm



L53080-1

L53080-2

特征说明:

材 质:SUS不供病

表面处理: SUS拉红、研光





stops 個 (1)

易较 豆链

库

章把 手

> 斑 吸

附

益 注。這用门版厚度T-3mm 地址: 广东省肇庆市高要区金利镇都播工业区电话: 13929897256邮箱: 526202547@qq.comAdd: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong ProvinceTEL: 13929897256Email: 526202547@qq.com

· 结构功能: 外篇式明装拉手。通过想丝固定。 安装拆

即而屬方值,把手服大承要50kg

遼:一般透開子机師、机恒、南部、机闸、机

床, 仪装仪器, 检测设备等振金箱体使用



음족

で で で の

喜柱 是锁

> 面 锁

豆连

五五年

及锁

る面

板

点锁

智知

ら領

墓拉

皇手

stop 個

易较

王链

latch

库 神把

手

斑

吸

附

位



lock III 柱兽

面

连世 H Com 類の

面首 板石 做a

搭B

抑음

限品 位的

较品 链豆

冷庫把 udle latch 手至 磁图 服 岩

特征说明:

標 圖: SUS不透铜

表面处理: SUS拉丝、電光

注: 酒用门板刚度1-3mm

结构功能: 唱發寫圖式拉手,通过塑丝固定,安装拆


即而寫方便,把手墨大承重50kg


谕:一般适用于机箱、机格、机械、机床、工


具箱. 型材框架等适金设备箱体使用

附语 件号

LS4080-3 LS4080-2 LS4080-1

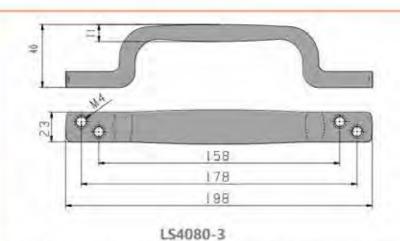

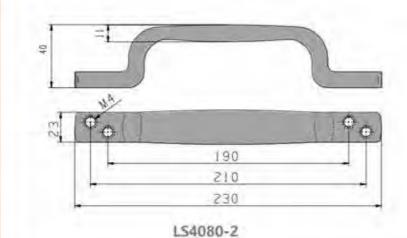

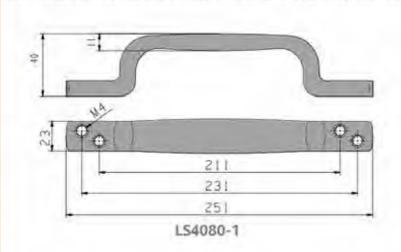



Material: SUS stainless steel

Surface treatment: SUS brushed, mirror light

Structural function: exposed hidden handle, fixed by screws, easy to install and disassemble, the maximum load of the handle is 50kg

Uses:Generally suitable for chassis, cabinets, electrical boxes, machinery, machine tools, instrumentation, testing equipment and other sheet

Remarks: Applicable door panel thickness 1-3mm

邮箱: 526202547@qq.com

2-M4深 (5)

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, silver, SUS brushed, mirror light

Structural function: exposed hidden handle, fixed by screws, easy to install and disassemble, the maximum load of the handle is 50kg

Uses:Generally suitable for chassis, cabinets, electrical boxes, machinery, machine tools, instrumentation, testing equipment and other sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm



Feature Description:

Material: ABS/nylon

Surface treatment: black, white

Structural function: hidden handle, screw fixing or card slot fixation,

easy and quick installation and disassembly

Uses: Generally suitable for chassis, cabinets, machinery, machine tools, toolboxes, profile frames and other sheet metal equipment boxes

Remarks: Applicable door panel thickness 1–3mm



LS183-1

特征说明:

树 雁:ZDC锌合金/SUS不断铜

表面处理: ZDC關色。福色、SUS拉丝、圆光

线构功能: 向画式拉手,通过键绘图定,安装拆翻筒 語方便快信

用 **途:一般适用于机箱、机柜、机桩、机桩、** 具格。型材框架等版金设备循体使用

· 苗 注:适用门板顺度1-3mm



LS183-1-3

特征说明:

·制 质: ABS/尼始

- 表面处理: 關色, 白色

- 恰视功能: 閩頭式拉手、推丝固定或卡槽固定、資質 拆卸而剩快源

用 遂:一般适用于机箱、机柜、机械、机床、工 直箱, 型材框架等協金设备箱体使用

量 汪:透用门腔厚图1-3mm

地址: 广东省肇庆市高要区金利镇都播工业区电话: 13929897256邮箱: 526202547@qq.comAdd: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong ProvinceTEL: 13929897256Email: 526202547@qq.com

metal boxes



鲁季

声 機

西京杆

召赞

西島

板

是锁

智知

を観

望拉

量手

stop 個

易较

王链

latch

神把

库

手

莊

吸

附

位

手骨 锁星

国 Pock 柱兽 锁点

连世 #F 03 戦る

面音 板る 概る

搭B 和음. 树

拉皇 手

限品 位 000

较品 链豆

冷库把手 Handle latch 西西

100 章 附石

件号

LS183-2

特征说明:

材 质: ZDC锌合金/SUS不锈伽 表而处理: ZDC票色、振色、SUS拉丝、偏光 结构功能:颜度式拉手、通过雌丝固定、安装拆卸制 弱方便快速。

道:一般造南于机箱、机柜、机械、机床、工 月箱、型材框架等诉金设备路体使用



L5183-2-3


特征说明:

材 層: ABS/尼龙 表面处理: 原色。 日色

信构功能: 弹师式拉琴,望丝回定或专用固定 安装 拆卸商易快售

造:一般透用子机额、机柜、机械、机械、工 具箱、型材框架導版金设备能体使用

汪: 這用门板厚度1-3mm

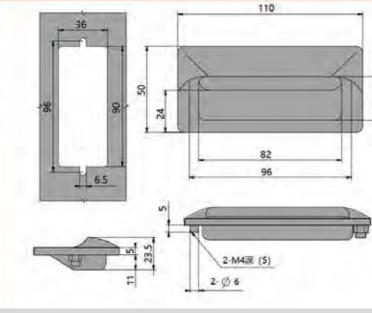

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, silver, SUS brushed, mirror light

Structural function: exposed hidden handle, fixed by screws, easy to install

and disassemble, the maximum load of the handle is 50kg

Uses:Generally suitable for chassis, cabinets, electrical boxes, machinery, machine tools, instrumentation, testing equipment and other sheet

Remarks: Applicable door panel thickness 1–3mm



Feature Description:

Material: ABS/nylon


Surface treatment: black, white

Structural function: hidden handle, screw fixing or card slot fixation,

easy and quick installation and disassembly

Uses: Generally suitable for chassis, cabinets, machinery, machine tools, toolboxes, profile frames and other sheet metal equipment boxes

Remarks: Applicable door panel thickness 1-3mm

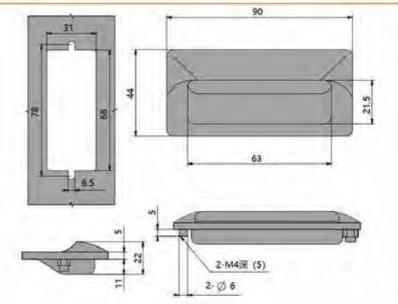

Feature Description:

Material: ZDC zinc alloy Surface treatment: black, white

Structural function: exposed hidden handle, fixed by screws, easy to install

and disassemble, the maximum load of the handle is 50kg Uses: Generally suitable for chassis, cabinets, electrical boxes, machinery,

machine tools, instrumentation, testing equipment and other sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm



Feature Description:

Material: ABS/nylon

Surface treatment: black, white

地址: 广东省肇庆市高要区金利镇都播工业区

Structural function: hidden handle, screw fixing or card slot fixation, easy and quick installation and disassembly

Uses: Generally suitable for chassis, cabinets, machinery, machine tools, toolboxes, profile frames and other sheet metal equipment boxes

Remarks: Applicable door panel thickness 1–3mm



なの回 喜柱 频频 面 锁 D连

L5183-3-1

特征说明:

· 村 版: ZDC锌合金

表面处理: ៣色、取错

- 統构功能: 圖圖式拉手,通过螺丝圈定。安装拆刷筒 易方便快捷

用途:一般透明于机箱、机柜、机械、机床、工 與量、型材框架等版金设备額体使用

> 益: 适用门板厚度1-3mm



LS183-3-2



LS183-3-3

特征说明:

制 质: AB5/尼龙

思而处理: 顺色、白色

结构功能: 静扁式拉手,像丝固定或卡桶固定,安装 拆卸篙易快惠

道:一般清用于钒筒、钒柜、机械、机床、工 具箱、型材框架等板金设备箱体使用

· 台 往: 追用门板厚度 1-3 mm

电话: 13929897256 邮箱: 526202547@qq.com

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



- 領

喜柱 锁

面

る物

る面

一板

点锁

智如

事手

(2

易较

豆链

latch

章 把

斑

吸

附



回公 柱号

平艺 面

连世 # OC ... 製品

概言 搭B

> 拉翼 手车

限品 位 00

链豆

磁图 服 章

附目 件号

冷库把 udle latch

面も 板市

抑음

较品

特征说明: 材 源: ABS/启龙

结构功能, 即测式拉手, 通过理丝固定, 安装探知制

逾!一般溶用子机带、机柜、机机、机床、工 具箱。型材框架等版金设备箱体使用 译: 透用门板厚度1-3mm



LS183-4-2




LS183-4-3

特征说明: 材 质: ABS/尼龙

表面处理: 黑色、白色 结构功能: 腦過式拉季,繼丝固定或手標固定,安慰

拆卸節風快鹽 滤:一般适用于机箱。机柜、机械、机床、工

具箱. 型材框架等镀金设备箱体使用 注: 适用门根顺原1-3mm

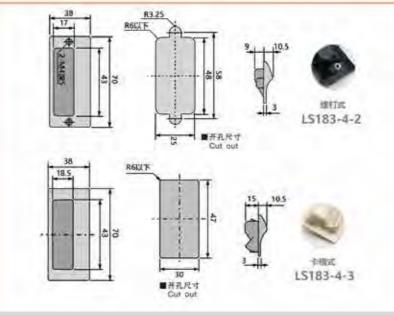

Feature Description:

Material: ABS/nylon

Surface treatment: black, white

Structural function: hidden handle, screw fixing or card slot fixation, easy and quick installation and disassembly

Uses: Generally suitable for chassis, cabinets, machinery, machine tools, toolboxes, profile frames and other sheet metal equipment boxes Remarks: Applicable door panel thickness 1-3mm



LS183-5

Feature Description:

Material: ABS/nylon

Surface treatment: black, white


Structural function: hidden handle, screw fixing or card slot fixation,

easy and quick installation and disassembly

■开孔尺寸

Uses: Generally suitable for chassis, cabinets, machinery, machine tools, toolboxes, profile frames and other sheet metal equipment boxes

Remarks: Applicable door panel thickness 1-3mm



Feature Description:

Material: ABS/nylon

Surface treatment: black, white

Structural function: hidden handle, screw fixing or card slot fixation, easy and quick installation and disassembly

Uses: Generally suitable for chassis, cabinets, machinery, machine tools, toolboxes, profile frames and other sheet metal equipment boxes

Remarks: Applicable door panel thickness 1–3mm





Feature Description:

Material: ABS/nylon

Surface treatment: black, white

Structural function: hidden handle, screw fixing or card slot fixation, easy and quick installation and disassembly

Uses: Generally suitable for chassis, cabinets, machinery, machine tools, toolboxes, profile frames and other sheet metal equipment boxes

Remarks: Applicable door panel thickness 1–3mm



特征说明

· 树 质: AB5/尼始

- 表面处理: 肌色。白色

整构功能: 總圖式拉孝、通过卡棚图定: 安设拆制箱 易方侧块曲

途:一般适用于机箱、机柜、机械、机床、工 員局、型材框架等質金设备维体使用

· 荷 注:透翔门顺厚度7-3mm



特征说明

材 原: ABS/用炮

老面处理: 黑色、白色

- 经构功能: 雌靈式拉手,通过卡侧固定,安表拆御符 易方便快速

途:一般适用于机箱、机柜、机械、机床、工 員職。型材框架等钣金设备销体使用

· 备 注:适用门板厚度1·3mm

地址: 广东省肇庆市高要区金利镇都播工业区电话: 13929897256邮箱: 526202547@qq.comAdd: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong ProvinceTEL: 13929897256Email: 526202547@qq.com





鲁季 豆 锁

のなり回

喜柱

频频

面

显镜

Di连

五多杯

品額

っ板

遊鐵

智知

E 锁

Handles

stop 個

出较

豆 链

latch

库 Purple lat

手

斑

吸

附

(1)



Ilock III 柱兽 版 in

面 锁点

证 comtrol lock 製品

面首 板市 概る

搭B 和음 Mol



限的 位000

较品 链豆

冷库把手 Handle latch

磁艺 100 1 S 特征说明:

表面处理: 制色。白色

暴方便快播

注: 适用门版厚度1-3mm


附石 件号



具備。型材框架等級金设备超体使用

注: 适用门原厚度7-3mm



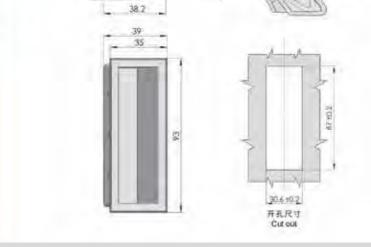

Feature Description:

Material: ABS/nylon

Surface treatment: black, white

Structural function: hidden handle, screw fixing or card slot fixation, easy and quick installation and disassembly

Uses: Generally suitable for chassis, cabinets, machinery, machine tools, toolboxes, profile frames and other sheet metal equipment boxes

Remarks: Applicable door panel thickness 1-3mm







LS537-5

结构功能: 泡刷式拉手、通过卡棚固定、安装拆卸制

途:一般透用于机箱、机柜、机械、机床。工

長精、堅材框架等協全设备箱体使用

Feature Description:

Material: ABS/nylon

Surface treatment: black, white

Structural function: hidden handle, screw fixing or card slot fixation,


easy and quick installation and disassembly


开孔尺寸


Cut out

Uses: Generally suitable for chassis, cabinets, machinery, machine tools, toolboxes, profile frames and other sheet metal equipment boxes

Remarks: Applicable door panel thickness 1-3mm





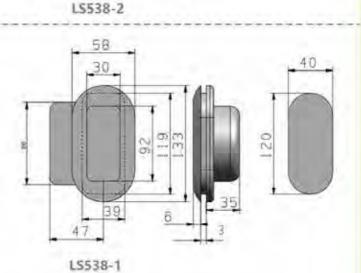



LS538-3



LS538-2



LS538-1

Feature Description:

Material: TPE rubber

Surface treatment: black, white

Structural function: hidden handle, screw fixing or card slot fixation,

easy and quick installation and disassembly

Uses: Generally suitable for chassis, cabinets, machinery, machine tools, toolboxes, profile frames and other sheet metal equipment boxes

Remarks: Applicable door panel thickness 1–3mm

特征说明:

· 闭 版: TPEAND

- 聚面处世: 川色, 白色

结构功能: 國際式拉手、通过卡標固定、安装拆卸荷

用 遊:一般适用于机箱。 机柜、机械、机床、工 買贈、型材框架等低金设备箱体使用

- 首 注:适用门板顺度T-3mm

地址: 广东省肇庆市高要区金利镇都播工业区电话: 13929897256邮箱: 526202547@qq.comAdd: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong ProvinceTEL: 13929897256Email: 526202547@qq.com

地址: 广东省肇庆市高要区金利镇都播工业区电话: 13929897256邮箱: 526202547@qq.comAdd: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong ProvinceTEL: 13929897256Email: 526202547@qq.com



음족 豆 锁

京回

鲁柱

がい

面

是赖

D连

及锁

る面

回板

是锁

香扣

Handles

stops 個

易较

立籍

latch

章把

catch E

库

手

吸

附

(2

手骨 锁星

Ilock Iock 柱号 版 wild

面言 锁是

连世 #F 03 Boge

面さ 板石 做ad

搭 和음

INE dots 位 000

较 8 雜三

冷库把手 Handle latch

LS539-500S

特征说明:

磁图 100 1

附石 件 Year

LS539-180

LS539-250



材 周: ARS基座/SUS基底。铝合金额/SUS管

结构功能: 外疆式大拉手、通过螺丝圈定安装,长短


检测设备等大型联金壳体使用


可報信管戶要求定制,安装拆断商易方便

道:一般适用于机床设备、CNC加工中心设备

表面处理: 服色、银色、SUS稳面

注: 不受门被厚原限制

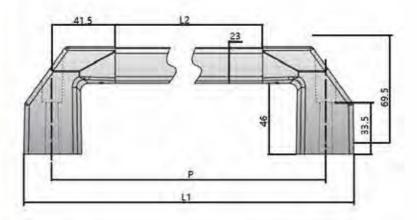





Feature Description:

Material: ABS base/SUS base, aluminum alloy tube/SUS tube Surface treatment: black, silver, SUS mirror

Structural function: exposed large handle, fixed and installed by screws, the length can be customized according to customer requirements, and the installation and disassembly are simple and convenient

Uses:Generally suitable for machine tools, CNC machining center equipment testing equipment and other large sheet metal shells Remarks: Not limited by door panel thickness



Material: ABS base, aluminum alloy tube Surface treatment: black, silver

地址: 广东省肇庆市高要区金利镇都播工业区

Structural function: exposed large handle, fixed and installed by screws,

the length can be customized according to customer requirements, and the installation and disassembly are simple and convenient

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

Uses:Generally suitable for machine tools, CNC machining center equipment testing equipment and other large sheet metal shells Remarks: Not limited by door panel thickness



材 商: ABS基底,铝合金管

括构功能,外面式大视导,通过壁丝固定安装,长短

道:一般适用于机床设备。CNC加工中心设备 检测设备等大型板金壳体使用

注:不受门极厚度刚制

100件

LS540-300银柄/黑座



LS540-300黑柄/黑座

要而处理: 黑色、丽色

可描述者户要求定制,安装按师简照方便

电话: 13929897256 邮箱: 526202547@qq.com





Ilock Iock 柱号 版 wild

平元 面 锁是

证 社 comtrol lock we we

面首 板石 做 ad

搭B 和음.

拉鲁

限dots 位的

较品 链豆

冷库把手 Handle latch

磁艺 IN SH

特征说明:

材 版: ABS基础。铝合金新

注: 不受门板厚原限别

·结构功能: 外編式大拉手,通过握丝固定安徽、长短


检测设备等大型振金壳体使用

可根据客户要求定制,安装所削高易方便


迹:一般道用于机乐设备。CNCMIT中心设备


表面处理: 图色: 旧色

附石 件 Year







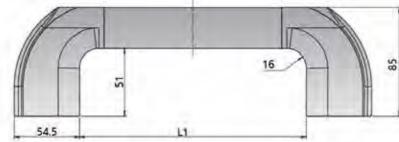

Feature Description:

Material: ABS base, aluminum alloy tube


Surface treatment: black, silver


Structural function: exposed large handle, fixed and installed by screws,

the length can be customized according to customer requirements, and the installation and disassembly are simple and convenient


Uses:Generally suitable for machine tools, CNC machining center equipment testing equipment and other large sheet metal shells Remarks: Not limited by door panel thickness

邮箱: 526202547@qq.com










LS545-3U



LS545-4U

Feature Description:

Material: ADC aluminum profile Surface treatment: black, silver

Structural function: exposed handle, fixed by screws, easy to install and

disassemble

地址: 广东省肇庆市高要区金利镇都播工业区

Uses: Generally suitable for chassis, server chassis, toolbox, lithium battery equipment and other small sheet metal boxes Note: Not limited by door panel thickness

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

电话: 13929897256

材 图: ADCISENT -美丽处理: 圖色: 版色

特征说明:

- 结构功能: 外国式拉手,到过壁绘画定: 安装拆卸筒 蜀方便快調

邮箱: 526202547@qq.com

LS545-4U

·用 · 遊: 一般這用于机能、服务器机制、工具箱、 經南设备等各种小板全層体

备 注: 不受门被厚度取割

鲁季 景镇 20回 鲁柱 (yillor 锁 品 锁 Di连 から行 夏锁 る面 回板 LS545-2U 豆锁 Pue 路如 bugg 拉斯斯· LS545-3U stop 個

出较 豆链

(2

画

e latch 奉

章把 至手

catch E 吸

附 件

312





LS551-100

LS551-120

음족 豆 锁

鲁柱 wile 数

> 面 品 粮

> > D连

四京杆

夏锁

る面

回板

豆锁

智如 短额

Handles

stop 個

易较

王箍

latch

库 章把

斑

(2



Dock III 柱兽

面

连打 H Com Boge

面首 板石 做 ad

搭B 和음.

限品

较 8

链豆

位

冷库把手 Handle latch

磁艺 服 章

特征说明:

材 順: ADC铝合金

表面处理: 黑色。祖色

這构功能: 外靠式大拉手,通过塑丝固定安装。长指

检测设量等大型版金票体使用


住: 不受门被厚度如创

可偿据客户要求定制,安装拆卸简易万俚

道:一般适用于机床设备。CNC加工中心设备

附石 件员

LS550系列

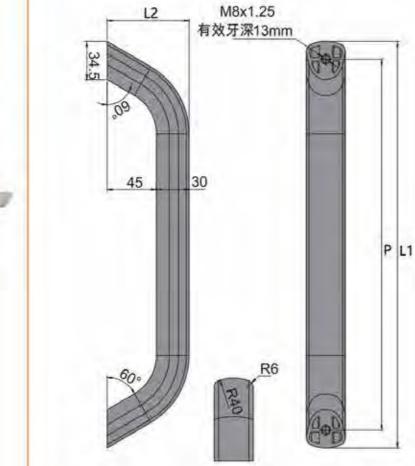


Feature Description:

Material: ADC aluminum profile

Surface treatment: black, silver

Structural function: exposed large handle, fixed and installed by screws, the length can be customized according to customer requirements, and the installation and disassembly

are simple and convenient Uses:Generally suitable for machine tools, CNC machining center equipment testing equipment and other large sheet metal shells Remarks: Not limited by door panel thickness

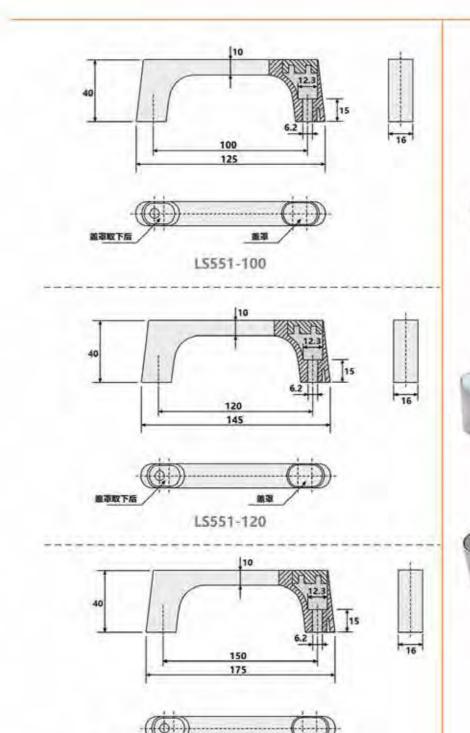

Feature Description:

盖邓取下后

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, silver, SUS brushed, mirror light

Structural function: exposed surface-mounted handle, fixed by screws,

cover can be customized in a variety of colors, easy and quick to install and disassemble

LS551-150

Uses: Generally suitable for medical equipment, testing equipment, test equipment, toolboxes, stainless steel sheet metal boxes

特征说明:

趋构功能; 外衞式賴裝拉手,何以穩丝圈定,熟章可 定制多种颜色。安装原加饱划快速

聚面处理: ZDC加色、腹褶、亚光、SUS拉丝、侧面

材 质: ZDC锌合金/SUS不透明

LS551-150

用 遊:一般這用于医疗设备。检测设备。试验证 葡,工具箱、不规则版金钢体使用 - 音 注: 不受门临师度限制

Note: Not limited by door panel thickness

地址: 广东省肇庆市高要区金利镇都播工业区电话: 13929897256邮箱: 526202547@qq.comAdd: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong ProvinceTEL: 13929897256Email: 526202547@qq.com

地址: 广东省肇庆市高要区金利镇都播工业区 电话: 13929897256 邮箱: 526202547@qq.com
Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

附 件号

和음

拉皇

限品 位 00

较 8 链豆



特征说明:

材 商: ADC紹合金/SUS不锈钢 表而处理: ZDC黑色、镀钼、亚光、SUS拉丝、锡面 结构功能: 外层或销售拉手,语过数丝固定,重复可

定制多种颜色、安果拆加阶层快温

途:一般适用于医疗设备、控则设备、试验设 益。工具物。不锈钢板金帮体使用

注:不受门板厚度例制









LS553-1

特征说明:

· 材 版: SUS304初版


是面处现: 拉丝。随面

話得功能: 外篇式除着拉手, 通过螺丝和锁头固定安

团纲框架, 不透明版金箱体使用

慧、副头分一字、三角、四角型 池:一般适用于不锈钢文件柜。 团电设备。不

注:适用门顺厚圆1-3mm



Feature Description:

Material: ZDC zinc alloy/SUS stainless steel


Surface treatment: ZDC black, silver, SUS brushed, mirror light

Structural function: exposed surface-mounted handle, fixed by screws,

cover can be customized in a variety of colors, easy and quick to install and disassemble

Uses: Generally suitable for medical equipment, testing equipment, test equipment, toolboxes, stainless steel sheet metal boxes

Note: Not limited by door panel thickness

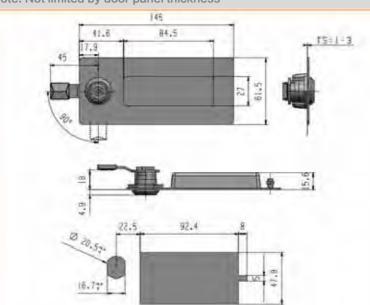

Feature Description:

Material: SUS304 material


Surface treatment: wire drawing, mirror

Structural function: exposed hidden handle, fixed installation by screws

and lock head, lock head is divided into one-line,

triangular, four-corner type

Uses: Generally suitable for stainless steel file cabinets, lithium battery equipment, stainless steel frames, stainless steel sheet metal boxes Remarks: Applicable door panel thickness 1–3mm

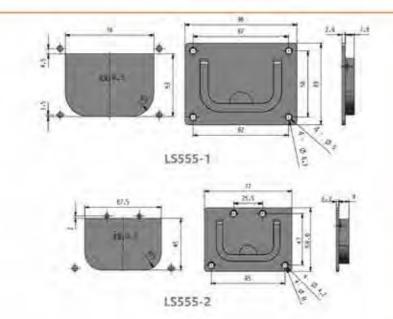

Feature Description:


Material: SUS304/316 material

Surface treatment: wire drawing, mirror

Structural function: exposed surface-mounted handle, fixed by screws, easy to install and disassemble

Uses: Generally suitable for yachts, ships, kitchenware, special vehicles special sheet metal equipment use

Remarks: Applicable door panel thickness 1-3mm

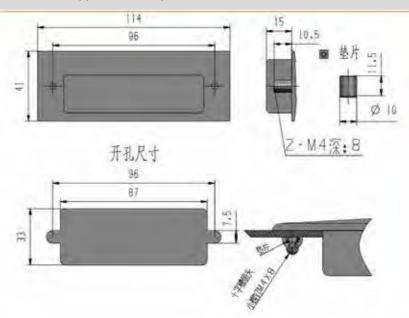

Feature Description:

Material: SUS304 material

Surface treatment: wire drawing, mirror

Remarks: Applicable door panel thickness 1–3mm

Structural function: exposed hidden handle, fixed installation by screws and lock head, lock head is divided into one-line, triangular, four-corner type

Uses: Generally suitable for stainless steel file cabinets, lithium battery equipment, stainless steel frames, stainless steel sheet metal boxes

途:一般透用于不例例文件柜、幅用设备。不 团纲框架, 不惯调版金额体使用 注: 通用门板加度1+3mm 地址: 广东省肇庆市高要区金利镇都播工业区电话: 13929897256邮箱: 526202547@qq.comAdd: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong ProvinceTEL: 13929897256Email: 526202547@qq.com

LS556-1

结构功能:外原式原源拉手, 通过现丝剧定。安景桥

特征说明:

材 商; SUS304材质

简方便快挪

表面处理:拉丝。幅面

L5555-1 LS555-2

结构功能: 外原式超襲拉手。通过冒丝固定,安装拆

李 豆 锁 柱 锁 面 显锁 豆连 西京杆

及锁 る面

- 板 点锁

途:一般适用于游艇、轮船、肥具、物种车辆 告扣

商 注:适用门板厚型T-3mm

即同局方便快捷

特种版金设备便用

>材 画: SUS304/316梯度

- 製面处理: 拉丝、绿面

特征说明:





(2

易较 豆链

把

斑 吸

连马

戦る

限品

特征说明:



特征说明:

初 质: SPCC/SUS两种材质

要而处理: SPCC顺裕。SUS本色 结构切關: 门领服位装置,源过增益固定。 安装拆卸

而居方便。分左右方向

逾:一侧透用于门板开台刷位,使用于机柜。 机箱。尼电柜 机侧设备饭金等

注:不受门板厚度规制,常规产品....敬请誓询









TX80-2 分左右

结构功能: 门板眼位蒙面,通过螺丝翻定。安装前那

道:一般适用于门版并合限位,使用于机作。

机制, 配电柜, 机械设备钣金等

简则方便,分左右方向

材 顺: SPCC/SUS商阶材质

表面处理: SPCC镀铝。SUS本色

Feature Description:


Material: SPCC/SUS two materials

Surface treatment: SPCC chrome plating, SUS natural color

Structural function: door panel limit device, fixed by screws, easy to install and disassemble, divided into left and right directions

Uses: Generally suitable for door panel opening and closing limit, used in

equipment sheet metal, etc

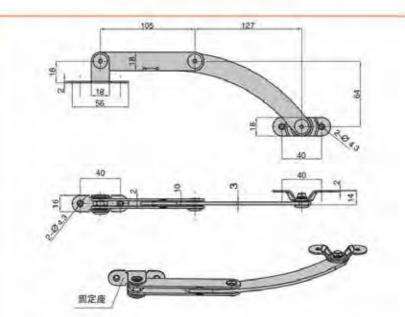

Feature Description:

Material: SPCC/SUS two materials


Surface treatment: SPCC chrome plating, SUS natural color

Structural function: door panel limit device, fixed by screws, easy to install and disassemble, divided into left and right directions

Uses: Generally suitable for door panel opening and closing limit, used in cabinets, chassis, power distribution cabinets, mechanical

equipment sheet metal, etc

Remarks: Not limited by the thickness of the door panel, conventional products.... Please contact us

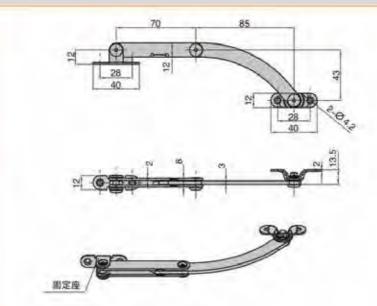

cabinets, chassis, power distribution cabinets, mechanical

Remarks: Not limited by the thickness of the door panel, conventional products.... Please contact us

地址: 广东省肇庆市高要区金利镇都播工业区

Structural function: door panel limit device, fixed by screws, easy to install

Uses: Generally suitable for door panel opening and closing limit, used in

cabinets, chassis, power distribution cabinets, mechanical

and disassemble, divided into left and right directions

Surface treatment: SPCC chrome plating, SUS natural color

Remarks: Not limited by the thickness of the door panel,

conventional products.... Please contact us

Mounting bracket

Feature Description:

Feature Description:

Material: SPCC/SUS two materials

equipment sheet metal, etc

Material: SPCC/SUS two materials

equipment sheet metal, etc

Surface treatment: SPCC chrome plating, SUS natural color

Remarks: Not limited by the thickness of the door panel,

conventional products.... Please contact us

Structural function: door panel limit device, fixed by screws, easy to install

Uses: Generally suitable for door panel opening and closing limit, used in

cabinets, chassis, power distribution cabinets, mechanical

and disassemble, divided into left and right directions

电话: 13929897256

特征说明:

材 质: SPCC/SUS而种材质

· 表面处理:SPCCIBIS、SUS本色

邮箱: 526202547@gg.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

结构功能:门板限位多面,通过现在固定,安装拆卸

途:一般适用于门板开合铜位,使用于机柜

机键 配电柜 机械设备版金岩

注: 不受门板厚原规则,常规产品.... 服饰重询

圆梯方便, 分左右方向

TX90-2 分左右

TX90-1

分左右

结构功能: 门城侧位姚则,排过螺丝創定,安装拆卸

用 途: 一般适用于门框开合限位,使用于机锭。

胡精、配饱柜、机械设备钣金等

注: 不受门板用压泥制, 常规产品.....敬请压询

简规方则,分左右方向

特征说明:

材 画: SPCC/SUS两种材质

表面处理:SPCC包括。SUS本色



で る で の で 草柱 呈锁

- 機

画 锁

D连 西京杆 召赞

る面 一板 是锁

智知

手

な限 賣位

易较 豆链

latch 库 把 手

斑 吸









鲁季 - 锁

なの回

喜柱

锁

画

Di连

西京杆

及锁

で面

っ板

是锁

智知



国 Pock 柱界 锁的

面 锁是

连世 #F 00 戦る

面も 板。 60

搭 扣号

拉 手.

位言

较多

糖豆

冷库把 udle latch 手至

服 岩 附语

磁图



特征说明:


材 源: SPCC/SUS两种材质 表面处理: SPCC镀铬、SUS本色

皆构功能: 门板限位器置,通过增丝固定,安装拆制

TX90-3

而易方便,分左右方向 逾:一般适用于门板开合承位。使用于机柜。

机带、配电柜、机械设备锁金等 注:不受门框理理预制、常规产品...敬请重询

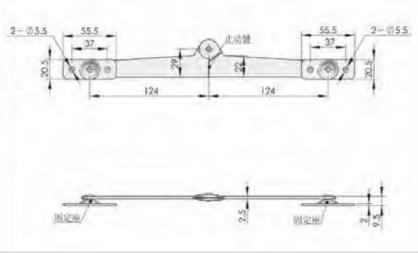

Feature Description:


Material: SPCC/SUS two materials

Surface treatment: SPCC chrome plating, SUS natural color

Structural function: door panel limit device, fixed by screws, easy to install and disassemble, divided into left and right directions

Uses: Generally suitable for door panel opening and closing limit, used in cabinets, chassis, power distribution cabinets, mechanical

equipment sheet metal, etc Remarks: Not limited by the thickness of the door panel,

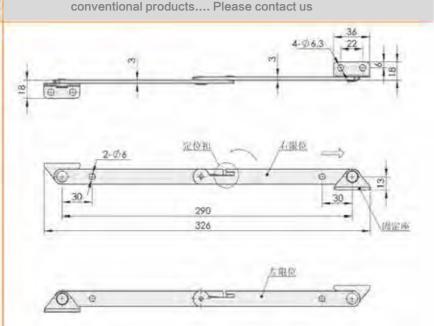

特征说明:

Material: SPCC/SUS two materials 材 质: SPCC/SUS两种物质

TX91-1

简显方便, 分左右方向

一般适用于门板开含阳位。使用于机柜。

机箱、泥电柜、机械设备钣金等

Surface treatment: SPCC chrome plating, SUS natural color 表面处理: SPCC物错, SUS本色

Structural function: door panel limit device, fixed by screws, easy to install 结构功能: 门板刚位装置,通过侧丝扇定,安装指加 and disassemble, divided into left and right directions

Feature Description:

Uses: Generally suitable for door panel opening and closing limit, used in cabinets, chassis, power distribution cabinets, mechanical equipment sheet metal, etc

Remarks: Not limited by the thickness of the door panel, conventional products.... Please contact us

电话: 13929897256 邮箱: 526202547@gg.com

闭查135 (84.6) 左跟位 170 [184.6]

Feature Description:

Feature Description:

Material: SPCC/SUS two materials

equipment sheet metal, etc

Surface treatment: SPCC chrome plating, SUS natural color

Remarks: Not limited by the thickness of the door panel,

地址: 广东省肇庆市高要区金利镇都播工业区

conventional products.... Please contact us

Structural function: door panel limit device, fixed by screws, easy to install

Uses: Generally suitable for door panel opening and closing limit, used in

cabinets, chassis, power distribution cabinets, mechanical

and disassemble, divided into left and right directions

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

Material: SPCC/SUS two materials

equipment sheet metal, etc

Surface treatment: SPCC chrome plating, SUS natural color

Remarks: Not limited by the thickness of the door panel,

conventional products.... Please contact us

Structural function: door panel limit device, fixed by screws, easy to install

Uses: Generally suitable for door panel opening and closing limit, used in

cabinets, chassis, power distribution cabinets, mechanical

and disassemble, divided into left and right directions

TX91-3

特征说明:

材 顺: SPCC/SUS两种材质

表面处理: SPCC镀铬。SUS本色

- 銘构功能: 门板関位装置。通过组绘图记。安装拆卸 简易方便。分左右方向

用 逾:一般造用于门板开合限位。使用于机柜。 机桶、配电柜、机械设备钣金等

語 注:不受门板原度调制,常规产品。政情學的







手

易较 豆链

a latch 神把

斑 吸

附

特征说明:

· 材 版: SPCC/SUS两种材质

泰面处理: SPCC顺铬, SUS本色

结构功能: 门板槽位落置、通过螺丝固定。安装拆卸 简易方便,分左右方向

TX92-2

图 途:一般滥用于门板开合限位,使用于机柜。 机箱、配电柜、机械设备镀金等

电话: 13929897256 邮箱: 526202547@gg.com

地址: 广东省肇庆市高要区金利镇都播工业区 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

李

回

鲁柱 频频

资 平

是競

D连

五克杆

多锁

る面

っ板

是锁

器加

拉

手

战限

資位

出较 王籍

latch

章把

库

手

磁

吸

附

件

面

冷库把 udle latch 手至 磁图

> 附石 件员

100 章





TX101系列

材 质 SPCC/SUS無种材质

期而处道: SPCC遵籍, SUS本色

结构功能: 门板树位装置,通过螺丝侧定,安装乐即

迹:一般适用于门版开合图位,便用于机柜。


注:不受门板即度配制,常须产品....敬语画出

机箱、配电柜、机械设备钣金等

简易万便。分左右方同

TX101-1



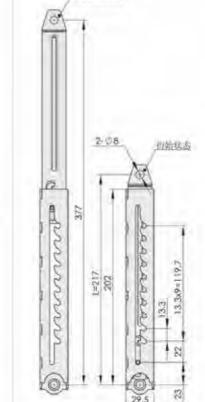

完全伸展状态

TX101-2

伸缩示意图



Feature Description: 特征说明:

Material: SPCC/SUS two materials

Surface treatment: SPCC chrome plating, SUS natural color

Structural function: door panel limit device, fixed by screws, easy to install

and disassemble, divided into left and right directions Uses: Generally suitable for door panel opening and closing limit, used in

cabinets, chassis, power distribution cabinets, mechanical equipment sheet metal, etc

Remarks: Not limited by the thickness of the door panel,

conventional products.... Please contact us

Feature Description:


Material: SPCC/SUS two materials


Surface treatment: SPCC chrome plating, SUS natural color

Structural function: door panel limit device, fixed by screws, easy to install and disassemble, divided into left and right directions

Uses: Generally suitable for door panel opening and closing limit, used in cabinets, chassis, power distribution cabinets, mechanical equipment sheet metal, etc

Remarks: Not limited by the thickness of the door panel, conventional products.... Please contact us

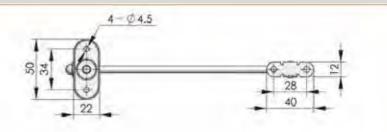

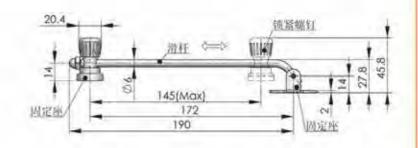

Feature Description:

Material: SPCC/SUS two materials

Surface treatment: SPCC chrome plating, SUS natural color

Structural function: door panel limit device, fixed by screws, easy to install and disassemble, divided into left and right directions

Uses: Generally suitable for door panel opening and closing limit, used in cabinets, chassis, power distribution cabinets, mechanical equipment sheet metal, etc

Remarks: Not limited by the thickness of the door panel, conventional products.... Please contact us

地址: 广东省肇庆市高要区金利镇都播工业区

景 锁 TX100-A

特征说明:


· 材 應:SPEC/SUS兩种材质

表面处理: SPCC锁铝, SUS本色

· 结构功能: 门临阳位动图,通过蛇丝剧定,安装探测 丽易方便,分左右方向

途: 一般适用于门板开合原位, 使用于机柜 机端, 起車柜, 机械设备额金等

注: 不受门贩顺烟限制, 州坝产品.... 酚透整剂



特征说明:

电话: 13929897256

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

一材 画: SPCC/SUS兩种材质

· 表面处理:SPCC 機構,SUS本色

结构功能: 门板限位装置,通过焊丝便定。受易折加 问题方便, 分左右方向

机箱、配电柜、机械设备镀金等

注:不受门极所度限制,常规产品....激调量询 邮箱: 526202547@qq.com

回公 柱界 领点

平 面 锁是

连世 打 00 戦る

面も 板。 锁言

搭 和意.

拉 手.



冷库把 udle latch

维三

磁图 服音 Z

限品

较品



- 结构功能: 门板限位装置,通过螺丝圈定,安装折断



材 原: SPEC/SUS两种材质

表面处理: SPCC镀铬, SUS本色

错构功能: 门柜观位猜到,通过则从固定。安息折削

途:一般适用于门板开合限位。使用于抓柜。

注: 不雙门版厚度規制, 常规产品.... 欧连星街

机桶、配电柜、机械设备镀金等

加易方便、分左右方向

PS032

材 质: SPCC/SUS阿种材度

表面处理: SPCC機铬、SUS布色

能易方便。分左右方向

道:一般造用于门提开合限位。使用于机范。

地址: 广东省肇庆市高要区金利镇都播工业区

机箱、阳电柜、机械设备钣金等

Feature Description: 特征说明:

Material: SPCC/SUS two materials


Surface treatment: SPCC chrome plating, SUS natural color


L=202 (常規) L=182 (威图)

Structural function: door panel limit device, fixed by screws, easy to install and disassemble, divided into left and right directions

Uses: Generally suitable for door panel opening and closing limit, used in cabinets, chassis, power distribution cabinets, mechanical equipment sheet metal, etc

Remarks: Not limited by the thickness of the door panel, conventional products.... Please contact us





Feature Description:

Material: SPCC/SUS two materials

Surface treatment: SPCC chrome plating, SUS natural color


Structural function: door panel limit device, fixed by screws, easy to install and disassemble, divided into left and right directions


Uses: Generally suitable for door panel opening and closing limit, used in cabinets, chassis, power distribution cabinets, mechanical

equipment sheet metal, etc

Remarks: Not limited by the thickness of the door panel, conventional products.... Please contact us

电话: 13929897256 邮箱: 526202547@gg.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com





Feature Description:


Material: SPCC/SUS two materials


Surface treatment: SPCC chrome plating, SUS natural color

Structural function: door panel limit device, fixed by screws, easy to install and disassemble, divided into left and right directions

Uses: Generally suitable for door panel opening and closing limit, used in cabinets, chassis, power distribution cabinets, mechanical equipment sheet metal, etc

Remarks: Not limited by the thickness of the door panel, conventional products.... Please contact us

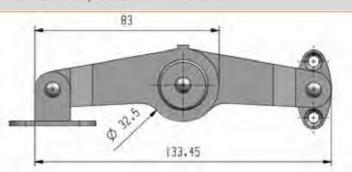



Feature Description:

Material: SPCC/SUS two materials

Surface treatment: SPCC chrome plating, SUS natural color

Structural function: door panel limit device, fixed by screws, easy to install and disassemble, divided into left and right directions

Uses: Generally suitable for door panel opening and closing limit, used in cabinets, chassis, power distribution cabinets, mechanical equipment sheet metal, etc

Remarks: Not limited by the thickness of the door panel, conventional products.... Please contact us



음족

- 領 なの回

喜柱 频频

> 画 锁

豆连 西京杆 る物

る面

一板

是锁

智知

材质: SPCC/SUS調神材质

表面处理: SPCC物格, SUS本色 · 结构功能: 门桩隔位范围,通过枢丝周层,安装拆卸

特征说明:

简易方便, 分左石方向

TX202-1

用 途: 一般适用于门极开合限位,使用于机柜 机箱。起車柜、机械设备镀金等







手 な限

賣位

易较 豆链

latch 库 静把

磁 吸

附

TX202-2

· 结构功能: 门板顶位装置,通过螺丝圆定,安装拆制

一般透用子门指开合限位。使用于机柜。

机箱、配电柜、机械设备饭金等

注:不受门板厚度预制,常规产品....败诸重询

同場方他,分左右方向

特征说明:

材 順: SPCC/SUS調料材质

表面处理: SPCC振信, SUS本色







回 Sock 柱号

面

连世 打000 製品

面音 板る 概る

搭 和品 锁员

拉至 手

图 dots

位员



冷库把手 Handle latch 磁图

> 2 附百 件号

100 元

HL30-1

特征说明:

材 质: ZDC综合金/SUS不识明

表面处理:ZDC脂色、價值,SUS拉丝、顶面 。结构功能:硝基胺但,通过复数固定,安晶拆卸简易

方便快便

途:一般使用于机桶机柜, 电箱电柜、机械设 層。自动化设备原金箱体使用

注:适用门板厚度1-3mm





HL40-1

特征说明:

材 员:ZDC综合金/SUS不例铜


表面处理: ZDC哪色、镀钼、SUS拉丝、倾面

·结构功能:明蒙校证,通过增丝固定,安装拆印初期

造:一般使用于机匠机柜、电箱电柜、机械设 66. 自动化设备被金箱体使用

注: 這用门板厚度1-3mm






Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, chrome plating, SUS brushed, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm




Feature Description:


Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, chrome plating, SUS brushed, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

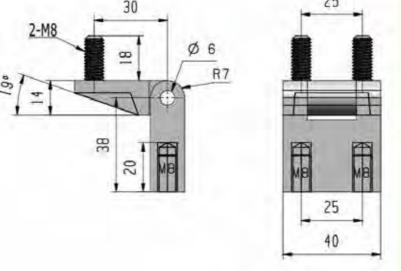





D连 西京杆 召锁

る面

是锁

香扣

を領

板

음족

五 锁

のなり回

喜柱 频频

画 品额

Feature Description:

Material: ZDC zinc alloy Surface treatment: ZDC black

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1–3mm

地址: 广东省肇庆市高要区金利镇都播工业区

Surface treatment: ZDC black, chrome plating, SUS brushed, mirror

install and disassemble

equipment, automation equipment sheet metal boxes

Structural function: exposed ammonium chain, fixed by screws, easy to


Uses: generally used in chassis cabinets, electrical cabinets, mechanical

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

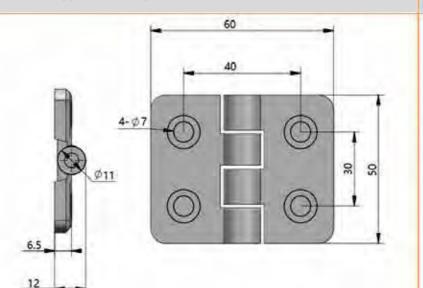

特征说明:

发面处理: ZDC测色

结构功能: 明號较短,而过超丝固定,安裝拆卸簡易 方便快挪

世:一般使用于抗癌机柜。电阻电柜。机械设 窗。自动化设备版金箱体使用

备 注: 這用门板厚厚1-3mm



手

品 限 1000 CD

库 把

莊

吸

附

特征说明:

初 順: ZDC評合金/SUS不根间

表面处理:ZDC黑色、赋格、SUS拉丝、顺面

· 皆模功能: 明星校信。通过螺丝固定,安装拆卸商品 方便快量

HL50-1

途: 一般使用于机箱机柜。电和电柜、机械设 版、自动化设备版金额体使用

注: 這用门版师匿1+3mm

邮箱: 526202547@qq.com 电话: 13929897256 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



음족

五 锁

in the

喜柱 是锁

画

锁

D连 西京杆

召赞

る面

っ板

点锁

る如

を被

手音 锁星

国 lock 柱兽

连可 打 000 戦る

面首 板る ()

搭 扣告 锁员

> 拉 手.

较品

冷库把手 Handle latch 磁图 100 元

> 附石 件号

限 dots 位



HL50-2

特征说明:

材 期:ZDC锌合金/SUS不锈钾 表而处理: ZDC加色、植物、SUS拉丝、编面 结构功能: 朝美轻胜, 通过螺丝固定, 安保折卸荷制

> 方便快捷 逾:一部便用于机箱机柜、电和电柜、机械设 卷、自动化设备适金箱体使用

注: 這用门板厚度1-3mm









4-\$7

HL50-1-2

特征说明:

材 质: ZDC综合金/SUS不锈钢

注: 這用门版厚座1-3mm

表而处理; ZDC顺色、顺铬、SUS拉丝、剪面 ·结构功能: 明景较度,通过塑丝固定,安装拆回层易

途:一般使用于机器机柜、电缆电框、机械设 意。自動化设备振金箱体使用

地址: 广东省肇庆市高要区金利镇都播工业区

Feature Description:

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

Material: ZDC zinc alloy/SUS stainless steel

52

30

4-\$7

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1–3mm

Surface treatment: ZDC black, chrome plating, SUS brushed, mirror

install and disassemble

equipment, automation equipment sheet metal boxes

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

Surface treatment: ZDC black, chrome plating, SUS brushed, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

30 50

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

邮箱: 526202547@gg.com

Remarks: Applicable door panel thickness 1–3mm

电话: 13929897256

21

Feature Description:

Material: ZDC zinc alloy

Surface treatment: ZDC black, chrome plating


Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm



Feature Description:

Material: ZDC zinc alloy

Surface treatment: ZDC black, chrome plating

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

HL089

特征说明

材 版: ZDC综合金

事而处理: ZDCM色。 镀铬

等校功能: 相等技能 通过现处图馆,安装拆卸施品

造: 一般使用于机模机柜、电辅电柜。机械设 器、自动化设备低金额体使用

HL090

结构功能: 明是较稳,通过那丝固定,安装拆卸阶易

番,自动化设备镀金箱体使用

途:一般便用于机管机柜、电精电柜 机机设

备 注:适用门版厚度T-3mm





拉 手

1000 CD

品较

章 把

莊 吸

附

特征说明:

材 版: ZDC符合金

表而处理: ZDC意色 题图

方便快捷

注: 這用门版厚度T-3mm



特征说明:

材 质: ZDCIP含金

表面处理; ZDC黑色。蓝馆

方便快捷

注: 這用门板厚度1-3mm



Bock 個 柱兽

连日 打 000 戦る

板る

面首

搭 扣告

拉 手

限 dots 位多

较品 链宝

冷庫把 udle latch

磁艺 服 岩


件号

HL095

店构功能: 明路铰链,而过螺丝周定,安哥拆卸简剔

器. 自动化设备锚金箱体使用

逾:一般使用于机箱机柜、电箱电柜、机械设

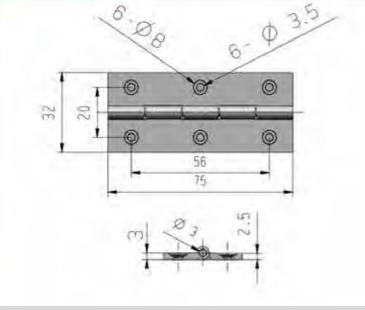

Feature Description:

Material: ZDC zinc alloy

Surface treatment: ZDC black, chrome plating


Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm







表面处理: ZDC面包: 植铂

易方便快播

注: 适用门柜原型 1-3mm

特征说明:

初 画: ZDC符合金

结构功能: 順尼式明刻较胜、通过蝴丝固定,安泰院

酷。自动化设备板金箱体使用

途:一般使用于机器机柜。电隔电柜: 机械设

HL096

Structural function: damping exposed dumpling chain, fixed by screws,

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

Remarks: Applicable door panel thickness 1–3mm


Feature Description:

Material: ZDC zinc alloy

Surface treatment: ZDC black, chrome plating

easy and convenient installation

equipment, automation equipment sheet metal boxes

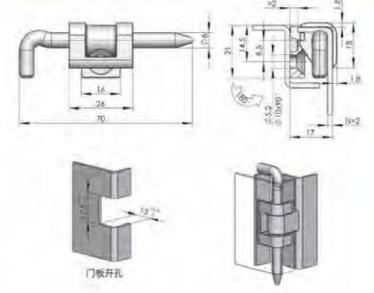

Structural function: concealed dumpling chain, fixed by screws, easy and

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

convenient installation

equipment, automation equipment sheet metal boxes







음족

特征说明:

号 圆: ZDC符合金

表面处理: ZDC黑色。语言

适构功能: 隐套铰链,通过超位限定,安装拆卸所加

方便快遍

途: 一般使用于机箱机柜。电箱电柜、机械设 音、自动化设备镀金箱体使用

备 注: 适用门板厚图1-3mm







る面 - 板

点锁

る扣

品较

把

莊

附

Feature Description:

Feature Description:

Surface treatment: ZDC black, chrome plating

Remarks: Applicable door panel thickness 1-3mm

Material: ZDC zinc alloy

Material: SPCC/SUS two materials

Surface treatment: SPCC galvanized, SUS natural color

Structural function: concealed ammonium chain, fixed installation by

welding, opening angle 90°

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

地址: 广东省肇庆市高要区金利镇都播工业区

特征说明:

电话: 13929897256

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

材 质: SPCC/SUS商利材度 表面处理: SPCC框锌、SUS本色

「哲构功能: 暗装铰链, 通过焊接固定安装, 开后角度

HL105

途:一般使用于机器机柜、电精电柜、机械设 备。自动化设备钣金箱体使用

住: 选矩门版即窗1-3mm 邮箱: 526202547@qq.com

地址: 广东省肇庆市高要区金利镇都播工业区 电话: 13929897256 邮箱: 526202547@gg.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

음족 五 锁

喜柱

呈锁

面 锁

豆连

日の行

習物

る面

- 板

点锁

香扣

概る

连世

较品 链量





特征说明:

材 质: PA材质 表面处理: 图6

结构功能: 咱想效益,避过自丝固定,安全拆削前则 方便快挪

逾:一般使用于机精机柜、电箱电柜、机械设

音. 自动化设备医金箱体使用 注: 這用门板原理1-3mm













HL109-R HL109-L

途:一般使用于机构机构。电和电阻、机械设

鲁. 鱼动化设备倾金箱体使用

注: 适用门板厚度1-3mm

特征说明:


材 原: ZDCW合金

表面处理: ZDC层色、弧铬

善物功能: 明驗较鏈、通过螺丝固定、安装拆割隔别

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm



Feature Description:


Material: PA material

Surface treatment: black

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm










Feature Description:

Material: ZDC zinc alloy

Surface treatment: ZDC black, chrome plating

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble



Feature Description:

Material: ZDC zinc alloy

Surface treatment: ZDC black, chrome plating

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1-3mm



特征说明:

· 材 版: ZDC锌合金

表而处理: ZDC配色、镀锡

方便快播

途:一般使用于机箱机柜、电箱电柜、机械设 音. 自动化设备概念输体使用

省 注: 适用门板原缝1-3mm





手


dots 限 位位

新校

章 把

斑 吸

附



Remarks: Applicable door panel thickness 1-3mm

Surface treatment: ZDC black, chrome plating

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

install and disassemble

equipment, automation equipment sheet metal boxes

Feature Description:

Material: ZDC zinc alloy

HL111-1

结构功能; 體製较發, 通过理丝固定, 安装拆卸制层

用 途: 一般使用于机解机柜, 电精电柜, 机械设

替, 自动化设备钣金箱体使用

注: 适用门板湿度1-3mm

特征说明:

材 质 ZDC综合金

表面处理: ZOC配色、返宿



手骨 锁星

国 lock 柱兽 領が

面

连世 打 00 製品

面台

板市

(4) 搭 扣号

锁uo 拉章 手

限 dots 位员

较智 冷库把手 Handle latch

> 磁艺 100 元

附石 件员

特征说明:

对 质: SPCC/SUS蔣神材质

表面处理: 5PCC链径, SUS拉丝、福面 恁构功能: 明装校框,现过原丝加进,安装拆卸而加

方便快顿 逾:一般使用于机箱机柜。电箱电柜、机械设

HL115-1

高。 自动化设备管金箱体使用 注: 這用门版原用T-3mm



HL123-1

特征说明:

材 源:ZDC综合金


表面处理: ZDC观色。 概容 结构功能: 砌著校德,逝过现丝圆莲,安设拆卸榆棚

途:一般使用于机箱机柜。电箱电柜、机械设 裔。自幼化设备版金箱体使用

地址: 广东省肇庆市高要区金利镇都播工业区

注: 這用门版庫度1-3mm





Feature Description:


Material: SPCC/SUS two materials

Surface treatment: SPCC galvanized, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

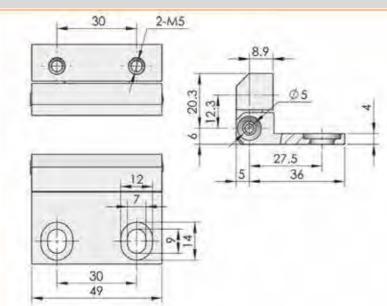

Feature Description:

Material: ZDC zinc alloy

Surface treatment: ZDC black, chrome plating

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

Feature Description:

Feature Description:

Surface treatment: ZDC black, chrome plating

Remarks: Applicable door panel thickness 1-3mm

地址: 广东省肇庆市高要区金利镇都播工业区

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

install and disassemble

equipment, automation equipment sheet metal boxes

Material: ZDC zinc alloy

Material: ZDC zinc alloy

Surface treatment: ZDC black, chrome plating


Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm



HL123-2

特征说明:

材 顺 ZDC综合金

专阅处理: ZDCM色、镀铝

方便快挪

着 注: 适用门顺厚度1-3mm

> 结构功能: 耶葵枝髓,通过微丝固宜,安稳拆加流度

途:一般使用于机箱机柜、电镜电柜、机械设

酱、自动化设备饭金额体使用



面

鲁季

锁

拉克杆 習慣

る面 板 点锁

15年 を領

手

dogs 限

贵 较

D000

库 更把

斑 吸

附

特征说明:

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

被 圆L ZDC锌合金

表面处理: ZDC简色、银箔

·结构功能:暗裂较健,通过那丝固定,安静拆卸简易 方便快迎

HL124

途:一般使用于机械机柜、电缆电柜。机械设 看, 自动化设备管金额体使用

注: 适用门板厚度1-3mm

电话: 13929897256 邮箱: 526202547@qq.com







国 lock 柱兽

面

连电 行 戦る

面も 板市 概る

搭 扣言 锁员

拉 手

限 dots

位员



件号

冷库把手 Handle latch 磁图 服 岩



HL125-1

特征说明:

材 质. SPCC/SUS两种材质

表面处理: SPCC镀锌, SUS本色 绘构功線: 唱装钗匠,通过焊接固定安装,开启角度

途:一般使用于机和机械、电程电相、机械设 备。自动化设备钣金箱体使用

注: 這用门板犀削1-3mm









HL125-2-1


特征说明:

材 质 SPCC/SUS两种材质 夏面处理: SPCC密释, SUS本色

·结构功能:蜡菱铰链 通过焊接质定安基,开启清度

途:一般使用于机鞘机棍。电循电棍。机械设 备、自动化设备饭金和体使用

注: 适用门板厚图1-3mm



Feature Description:


Material: SPCC/SUS two materials

Surface treatment: SPCC galvanized, SUS natural color

Structural function: concealed ammonium chain, fixed installation by welding, opening angle 110°

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm



Feature Description:

Material: SPCC/SUS two materials

Surface treatment: SPCC galvanized, SUS natural color


Structural function: concealed ammonium chain, fixed installation by

welding, opening angle 110°

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

电话: 13929897256 邮箱: 526202547@gg.com



Feature Description:

Feature Description:

Material: ZDC zinc alloy SUS stainless steel

Remarks: Applicable door panel thickness 1–3mm

地址: 广东省肇庆市高要区金利镇都播工业区

Surface treatment: ZDC black, chrome plating, SUS brushed, mirror

install and disassemble

equipment, automation equipment sheet metal boxes

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

Material: SPCC/SUS two materials

Surface treatment: SPCC galvanized, SUS natural color

Structural function: concealed ammonium chain, fixed installation by

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

welding, opening angle 120°

equipment, automation equipment sheet metal boxes



西京杆 召锁

っ板

点锁

告扣

位位

品 较

神把

莊

李

锁

柱 锁

特征说明:

材 题: SPCC/SUS两种材质


表面处理: SPCC删传, SUS本色

·结构功能: 輪器铰链, 通过焊接固定安装, 开启角度

迹:一般使用于机模机框、电阻电枢、机械设

層。自动化设置振金箱体使用

器 注: 透用门板厚度1-3mm

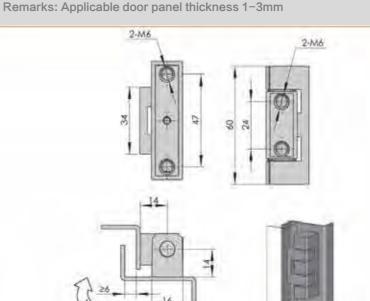



HL126-1

特征说明:

材 原: ZDC锌合金\SUS不德钢

表面处理: ZDC黑色、侧钮、SUS拉丝、倾面

后构功能: 網票铰链、通过增丝固定、安装拆削商品

方便快捷 选:一般使用于机箱机柜。电箱电柜、机械设

意。 自动化设备镀金箱体使用

注:這用门板厚度1-3mm

电话: 13929897256 邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



음족

- 領

が 回

喜柱

是锁

画 锁

西京杆

る額

漫画

点锁

る扣

を領

板



国 Pock 柱兽 锁的

面

连红 打 000 戦る

面も 板。 60

搭 扣告 锁员





图 dots

冷库把手 Handle latch

磁图

特征说明:

服 岩 S 件号

特征说明:

侧= ZDC锌合金\SUS不锈钢

表面处理 ZDC黨色、續絡、SUS拉登 備面 结构功能:阴弦较强,通过螺丝固定,安装折断简易

方便快源

迹:一般使用于机箱机柜。电箱电柜、机械设 备,自动化设备调金额体使用

法: 适用门板顺路1-3mm



Material: ZDC zinc alloy SUS stainless steel

Surface treatment: ZDC black, chrome plating, SUS brushed, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes



HL126-3

表面处理: ZDC關色 振音, 5U5拉丝、偏面

结构功能: 相樣较能, 通过螺丝固定。 安装拆面简明

箭、自动化设备恢金模体使用

一般使用于扒預机相。 电箱电柜。 机械设

材 農 ZDC锌合金\SUS不锈物

注: 适用门板厚度1-3mm


Feature Description:

Material: ZDC zinc alloy SUS stainless steel

Surface treatment: ZDC black, chrome plating, SUS brushed, mirror

install and disassemble


Remarks: Applicable door panel thickness 1–3mm



Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm



Feature Description:

Feature Description:

Material: SPCC/SUS two materials

Material: SPCC

Surface treatment: SPCC galvanized

Structural function: concealed ammonium chain, fixed installation by

welding, opening angle 90°

2-10.4

Surface treatment: SPCC galvanized, SUS natural color

Remarks: Applicable door panel thickness 1–3mm

地址: 广东省肇庆市高要区金利镇都播工业区

Structural function: concealed ammonium chain, fixed installation by

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

welding, opening angle 180°

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm



HL128

特征说明

表面处理: SPCC回译

途:一般使用于机箱机柜, 电箱电柜, 四域设 着。 自助化设备版金额体使用

音 注: 适用门板即度1-3mm








手

库

章 把

斑

附



特征说明:

备、目动化设备钣金程体使用 注: 适用门板厚直1-3mm

材 质: SPCC/SUS開幹材质

表面处理: SPCC键译。SUS本色

HL129

结构功能: 層號较能, 通过焊接固定安装, 开启角度

用 途:一般使用于机器机柜。电箱电柜、机械设

李 景 锁

草柱

锁

面

西京杆

る物

漫画

是锁

告扣

を領

手

位位

品 较

章 把

莊


附

板









面も 板石

搭 扣言

拉章 手

较品

特征说明: 材 價: SUS不锈钢材质

表面处理: SUS本色 结构功能:思要较能,通过自然或即接方式固定,较

短开启类闭90° 选:一般使用于机机机柜: 电阻电枢. 机械设 器. 自动化设备版金箱体使用

注: 這用门板厚度1-3mm





HL130

特征说明: 质. SPCC/SUS開种材质

表面处理: SPCC镀锌, SUS本色 结构功能: 暗装较低,通过加援固定安装、开启角度

> 逾:一般使用于机桶机柜。电和电柜、机械设 箭, 自动化设备镀金箱体使用

注: 适用门板厚膜1-3mm









HL132-2

Feature Description:

Feature Description:

Material: SPCC/SUS two materials

Surface treatment: SPCC galvanized, SUS natural color

Remarks: Applicable door panel thickness 1-3mm

Structural function: concealed ammonium chain, fixed installation by

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

welding, opening angle 90°

equipment, automation equipment sheet metal boxes

Material: SUS stainless steel

Surface treatment: SUS natural color

Structural function: concealed dumpling chain, fixed by screw or welding, dumpling chain open and close 90°

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm





Surface treatment: SPCC galvanized, SUS natural color

Remarks: Applicable door panel thickness 1–3mm

Structural function: concealed ammonium chain, fixed installation by

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

welding, opening angle 90°

equipment, automation equipment sheet metal boxes

Feature Description:

Material: SPCC/SUS two materials





HL137

特征说明:


制 质: SPCC/SUS两种初质 表面处理: SPCC领挥, SUS本色


」這构功能:暗景技術 通过焊接固定安装,开启角度

备 注: 适用门板厚图1-3mm



途: 一般使用于机箱机柜、电箱电柜、机械设 音、自动化设备镀金箱体使用





Surface treatment: SPCC galvanized, SUS natural color

Remarks: Applicable door panel thickness 1–3mm

Structural function: concealed ammonium chain, fixed installation by

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

welding, opening angle 90°

equipment, automation equipment sheet metal boxes

Feature Description:

Material: SPCC/SUS two materials





HL138

特征说明:

材 颐: SPEC/SUS兩种材质

表面处理: SPCC循译, SUS本色

信构功能: 研험较谱、通过即恢阅定安徽、开启角度

选:一般使用于执着机柜。电箱电柜、机械设 意。自动化设备镀金额体使用

注: 這用门板厚度1-3mm

邮箱: 526202547@qq.com



锁

面

Di连

日の行

習慣

る面

板

是锁

智知

ら彼

手

如限

手具 锁星

回公 柱号 版 wild

平艺 面

连世 # OC ... 戦る

面台 板元 ()

搭 扣号 锁克

> 拉 手

限 dots 位 00

> 磁图 100 章 S

附石 件号

较品 链量 冷库把手 Handle latch

特征说明:

材 质:SUS不然则 表面处理: SUS拉丝、输面

结构功能: 明装较髓,通过增效固定。安装拆卸简频 方便快调

HL142

遗:一般使用于机器机柜、电箱电柜。 机械设 額、自动化设备钣金额体使用

注: 清阳门坂厚度!-3mm











HL152

途:一座使用于机箱机柜;电标电柜。机械设

省, 自动化设备钣金和体使用

注: 這用门板原度1-3mm

特征说明:


材 面 SUS不锈铜


Surface treatment: SUS brushed, mirror 表面处理: SUS拉丝、铜壶

经构功期: 观想较强、测过理丝测定,安装拆卸简易 install and disassemble

> Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm





Feature Description:


Material: SUS stainless steel


Surface treatment: SUS brushed, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm





Feature Description:

Material: SUS stainless steel

Structural function: exposed ammonium chain, fixed by screws, easy to

地址: 广东省肇庆市高要区金利镇都播工业区 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

电话: 13929897256

特征说明:

表而处理: 侧色、麻煎、 铜色、镀铬

注: 运用门板师屋1-3mm 邮箱: 526202547@qq.com

金、自动化设备箱体使用

结构功能: 明緒可謂式組力铰链, 大小力度可以调节

间过退丝固定,安装拆削制品快抛方顶

道:一概透用于机械机机、机械设备、精密结

鲁季 - 锁 なの回 喜柱

HL153-1

特征说明:

板 项:ZDC综合金


表而处理:原色、麻蒜、银色。銀箔

。结构功能: 閱憶可謂式組力較强,大小力度可以调节 通过基丝刚定。安装拆卸加票快加方便

迹:一般适用于机箱机柜、机械设备、休息板

金、自动化设备循体信用

备 注: 適用门板炉原1-3mm

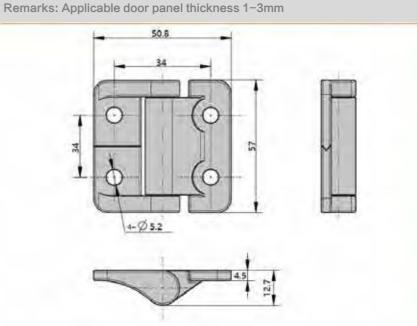



Feature Description:

Surface treatment: black, linen black, silver, chrome

Structural function: exposed adjustable resistance dumpling chain, the

easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

size and strength can be adjusted, fixed by screws,

Material: ZDC zinc alloy

Material: ZDC zinc alloy

Surface treatment: black, linen black, silver, chrome

Structural function: exposed adjustable resistance dumpling chain, the size and strength can be adjusted, fixed by screws,

easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1–3mm

HL153-2

1000 CD 品 较 主链 latch

p 把

磁 吸

库

S 附石

冷库把手 Handle latch 磁图 100 章

特征说明:

材 面 SUS不锈铜

表面处理: SUS拉丝、铜壶

件号



树 原: ADC语合命

夏而处理: 黑色、斑砂

方便快调

注: 选用门版厚度!-3mm

结构功斯: 明装较髓,通过增量固定。安装拆卸部机

額, 自动化设备钣金器体使用

遗:一般使用于机箱机柜、电箱电柜、机械设

Feature Description: 特征说明:

Material: ADC aluminum alloy

Surface treatment: black, sandblasted

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm



HL156-2

经构功期:观器铰链、测过理丝测定,安装拆卸简易

省, 自动化设备钣金和体使用

译: 這用门板厚度1-3mm

途:一座使用于机箱机柜;电标电柜。机械设

Feature Description:

Material: SUS stainless steel

Surface treatment: SUS brushed, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

Ø10 6-05.5





日の行 習物

李 景 锁

喜柱

频频

面

锁

D连

漫画

点锁

香扣

を锁

手

主链

库 章 把

手

斑

吸

附

板

Feature Description:

Material: SUS stainless steel

Surface treatment: SUS brushed, mirror


Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm



Feature Description:

Material: ZDC zinc alloy, cover plate ABS

地址: 广东省肇庆市高要区金利镇都播工业区

Surface treatment: black

Structural function: exposed adjustable resistance dumpling chain, the size and strength can be adjusted, fixed by screws, easy to install and disassemble

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1–3mm

特征说明

材 版: SU5不锈机

專面处理: SUS拉丝、原面

· 结构功能: 阿梨咬链, 漏过增丝固定, 安装拆卸施泵

选: 一般使用于机箱机柜、电箱电柜、机械设 器、自动化设备仮金循体使用

HL163

注: 适用门板厚度1-3mm



HL195

特征说明:

材 图: ZDCIP合金,直板ABS

夏而处理: 順色

结构功能:阳泉阻力较错,通过加丝侧定安装,採配 量极。大小田力可调节、拆卸安装方便

途: 一般使用于机箱机柜 电轨电相、机械设 备、自动化设备饭金箱体使用

注: 适用门板厚度1-3mm

电话: 13929897256 邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



鲁季

- 領

で る で の で

柱

锁

画 显锁

D连

西京杆

る物

设面

板

点锁

語如

ら領

手

如限

位位

多校

章 把

莊

吸



Bock III 柱粤 锁 cylin

面

连中 # OC ... 製品

面首 板市 概言

搭 扣告 锁员

拉 手草

位 较品

链宝

限 dots

冷库把 udle latch

磁图 服 岩

附石 件号

HL201-1

特征说明:

ZDC黑色

材 页:ZDC锌合金/SUS不锈钢 表面处理: ZDC層色、簡砂、SUS拉丝、输面 恁构功能: 幽陵较强,强位雄丝固定,安装拆回简副

> 方便快捷、附件焊槽 逾:一般适用于机柜机箱、PS\PE机柜、配电

相等各种大型版金相体使用 注: 适用门极原题 1-3mm







HL201-1A

特征说明:

制 原: ZDC综合合 表而处理: 黑色。砂面

善构功能: 婚級攸語。通过超盐固定,安蒙拆面简别 方便快捷。耐性尿張

途:一般透用于机柜机制, PS\PE机能, 配电 柜等各种大型饭金柜体使用


注: 减用门板厚加1-3mm

Feature Description:

Surface treatment: black, sand

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power distribution cabinets and other large sheet metal cabinets




Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, chrome plating, SUS brushed, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble, Accessory welding


Uses: Generally suitable for cabinet chassis, PSPE cabinets, power distribution cabinets and other large sheet metal cabinets Remarks: Applicable door panel thickness 1-3mm



Material: ZDC zinc alloy

install and disassemble, Accessory welding

Remarks: Applicable door panel thickness 1–3mm



Feature Description:

Feature Description:

Surface treatment: black, sand

Material: ZDC zinc alloy

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, chrome plating, SUS brushed, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble, Accessory welding

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power distribution cabinets and other large sheet metal cabinets Remarks: Applicable door panel thickness 1-3mm



特征说明:


>材 质: ZDC锌合金/SUS不例铜

表面处理: ZDC၏色、器砂、SUS拉丝、幅面

· 结构功能: 据装校籍,通过据丝图定,安装指向前息 方便快捷。例件焊接

造:一般适用于机柜机桶、PS\PE机柜、配电 拒絕各种大型經產拒体使用

· 查 注: 适用门版原度1-3mm



Structural function: exposed ammonium chain, fixed by screws, easy to

distribution cabinets and other large sheet metal cabinets

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power

Remarks: Applicable door panel thickness 1-3mm

install and disassemble, Accessory welding



HL201-3

特征说明:

·树 周: ZDC持合金

表面处理: 黑色。砂面

·结构功能: 必要较能,通过整丝固定,安慰拆御加泉 方便快挪。附件焊接

途:一般适用于机柜机箱、PS\PE机柜、配电 厄哥各种大型饭金柜体使用

注: 适用门板厚度1-3mm

邮箱: 526202547@qq.com

地址: 广东省肇庆市高要区金利镇都播工业区 电话: 13929897256 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

地址: 广东省肇庆市高要区金利镇都播工业区 电话: 13929897256 邮箱: 526202547@gg.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



鲁季

- 锁

喜柱

是锁

画 锁

D连

四京杆

召锁

る面

一板

是锁

告扣

ら彼



连红 # OC .

概る

扣告





特征说明:

材 质: ZDC综合含

表而处理: 黑色 砂面



特征说明: 材 质: ZDC持合金

表面处理:黑色、砂面 结构功能:通過较低,過过超丝固定,安易拆倒周期 方便快號,同件課提

HL201-4





善物功能: 結架铰链 通过超型固定,安装拆面箱则

柜等各种大型板金柜体使用

途:一般透角于机柜机桶,PS\PE机相,配电

方便快捷。附件邓摄

注: 這用门板厚度1-3mm




Feature Description:

Material: ZDC zinc alloy

Surface treatment: black, sand

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble, Accessory welding

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power distribution cabinets and other large sheet metal cabinets Remarks: Applicable door panel thickness 1–3mm

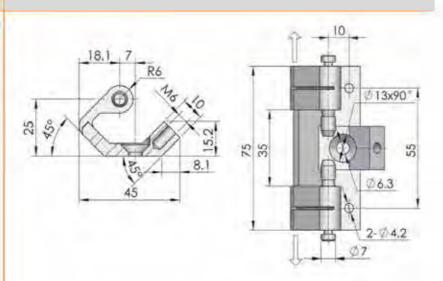

Feature Description:

Material: ZDC zinc alloy


Surface treatment: black, sand

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble, Accessory welding

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power distribution cabinets and other large sheet metal cabinets

Remarks: Applicable door panel thickness 1–3mm

电话: 13929897256 邮箱: 526202547@gg.com



Feature Description:


Material: ZDC zinc alloy Surface treatment: black, sand


Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble, Accessory welding

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power distribution cabinets and other large sheet metal cabinets







Feature Description:

Material: ZDC zinc alloy

Surface treatment: black, sand

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble, Accessory welding

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power distribution cabinets and other large sheet metal cabinets

Remarks: Applicable door panel thickness 1–3mm 地址: 广东省肇庆市高要区金利镇都播工业区



HL201-6

特征说明:

· 切 质: ZDC锌合金

哥面处理: 量色、砂而

特征说明:

电话: 13929897256

材 质: ZDC符合合

夏面处理: 創色: 砂面

话构功能: 斯蒙较ি 强力加丝周冠,安装拆卸局别 方便饶德。附件焊度

途:一般造用于机柜机桶。PS\PE机柜、配电 相等各种大型版金柜体使用

备 注: 适用门板厚度1-3mm





手

dogs 限 0000

黄铰

静把

斑 吸

附

注: 适用门顺厚圆1-3mm 邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

HL201-7

结构功能: 醫業校链,過过壓丝固定。安等拆卸简易

柜等各种大型板金指体使用

途:一般透用于机管机制、PS\PE机柜、配电

方面快進。附件焊接



음족

- 機

が 回

喜柱 频频

> 画 锁

D连

西京杆

召锁

る面 っ板

是锁

告扣

手

手具 锁星

回りた 柱兽

面

连红 # OC . 製品

面台 板も 概言

搭 扣号 锁员

拉 手



冷庫把 udle latch 磁图

服

件音

限 dots 位员

特征说明: 版 圆 ZDC锌合金 表面处理:黑色、砂壶 ·结构功能: 國裝校區,通过塑丝固定,安裝拆卸開局





HL201-9

特征说明:

村 质: ZDC符合金 表面处理: 周色、砂面

益得功能: 暗喪校體,過过調益固定。安裝拆卸黨則 方便快挑。剧件焊接

> 途:一般适用于机柜机阻、PSYPEILIE、配用 柜等各种大型板全柜体使用

注: 适用门板厚度 1-3mm







HL201-12

方便快遞、附件焊接

注: 福用门根厚度1-3mm

柜等各种大型版金柜体使用

造:一般适用子机柜机箱、PS\PE机柜、配电

Feature Description:

Material: ZDC zinc alloy

Surface treatment: black, sand

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble, Accessory welding

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power distribution cabinets and other large sheet metal cabinets

Remarks: Applicable door panel thickness 1–3mm

电话: 13929897256 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com




Feature Description:

Material: ZDC zinc alloy


Surface treatment: black, sand

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble, Accessory welding

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power distribution cabinets and other large sheet metal cabinets Remarks: Applicable door panel thickness 1-3mm

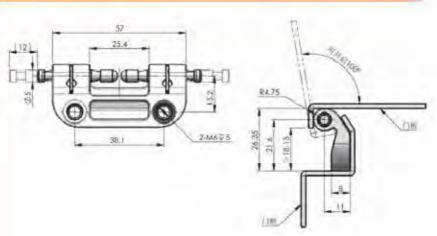

邮箱: 526202547@gg.com 地址: 广东省肇庆市高要区金利镇都播工业区 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



Structural function: exposed ammonium chain, fixed by screws, easy to

distribution cabinets and other large sheet metal cabinets

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power

install and disassemble, Accessory welding

Feature Description:

Feature Description:

Surface treatment: black, blue, silver

Remarks: Applicable door panel thickness 1–3mm

Material: ZDC zinc alloy

Surface treatment: black, blue, silver

Material: ZDC zinc alloy





HL202-1

特征说明:


材 质: ZDC锌合金

西面处理: 侧色、蓝色、银色

。信仰功能:關门较强,通过重丝固定,安装拆御简剔 方硬快捷。耐件焊接

途:一般适用于机柜机相、PS\PE机柜、配电 拒测各种大型监查拒续使用

省 注: 這用门板厚度1-3mm

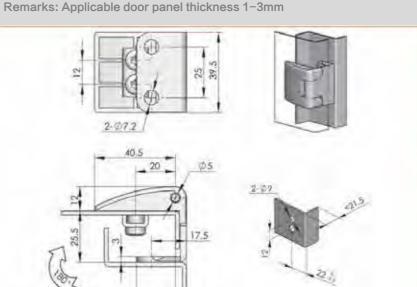

Structural function: exposed ammonium chain, fixed by screws, easy to

distribution cabinets and other large sheet metal cabinets

Uses: Generally suitable for cabinet chassis, PSPE cabinets, power

install and disassemble, Accessory welding

门板开孔。





HL202-2

特征说明:

材 质: ZDC符合金

要而处理: 用色、蓝色、银色

结构功能: 侧门铰链,通过现丝固定。安装拆卸周易 方便快捷。附件焊接

造:一般這周子机柜扒箱、PS\PE机柜、配电 柜等各种大型钣金租件使用

注: 遊用门級原理1-3mm

电话: 13929897256 邮箱: 526202547@qq.com 神 把

磁



鲁季

声 機

柱 锁

> 面 锁

D连

西京杆

板

更锁

香扣

ら領



国 Pock 柱界

面

连trong # 000 H 製品

面も 板元 锁是

搭 和高 锁员

拉至 手草

限 dots 位员

较品 维星

冷库把手 Nandle latch

西西 100 章

件号



特征说明:

材 原 ZOC锌合金/SUS不锈钢

表面处理: ZDC黑色、纳米、原稿、SUS拉丝、川面 结构功能: 阴装铰链,通过螺丝固定,安装拆卸隔息

院加方德, 有左右之分

途:一般使用于通讯机构机柜、电箱电柜、机 械机床设备等協会籍体使用

注: 适用门板顺度1-3mm






特征说明: 材 版: ZDC锌合金/SUS不锈菌

住: 适用门板圆度1-3mm

表而处理: ZDC黑色、纳米、原络、SUS拉丝、同面 给构功能:研装铰链,通过螺丝固定,安装拆卸简易

途:一般使限于通讯机箱机柜、电筒电柜、机 胍机床设备等钣金箱体使用




Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble, quick and convenient, there are left and right

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm




Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

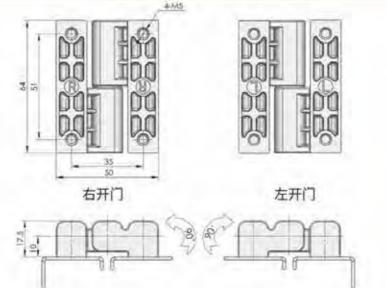

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble, quick and convenient, there

0

0

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

HL203-3

特征说明:





厨 页: ZDC符合金/SUS不例刷

表面处理:ZDC颜色、纳米、碳铬、SUS拉丝。精面 · 结构功能: 網裝物體,通过關於關定,安裝拆御問題 快振方便 有左右之分

- 用 : 一般使用于通讯机着机柜 电箭电柜 机 個机床设备等版金額体使用

音 注: 透用门板厚度1-3mm







如限 1000 CD

8 校

库 神把

莊

附

Feature Description:

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

are left and right

Remarks: Applicable door panel thickness 1–3mm

20.5 右开门

0

Material: ZDC zinc alloy/SUS stainless steel

地址: 广东省肇庆市高要区金利镇都播工业区

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble, quick and convenient, there are left and right

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1-3mm

特征说明:

材 质: ZDCIP含金/SUS不透明

表面处理:ZDC服色、她米、他路、SUS拉丝、顺面

HL203-4

- 结构功能:暗装较短,通过概丝固定,安装拆加阶易 快顺方便,有左右之分

途:一般使用于巡讯抓精机柜、电筒电柜。机 械机床设备等板金链体使用

注: 逻用口板师度1-3mm

电话: 13929897256 邮箱: 526202547@gg.com 板。

梅 5

位员

100 元



HL204-1

特征说明:

材 商: ZDC符合金/SUS不锈丽 表面处理: ZDC账色 纳米 镀铬 SUS拉丝 锚面 路稱功能: 順葉接箍,通过螺丝固定,安装拆即箭星 快扭方便

> 途:一般使用于通讯机箱机柜。电箱电柜、机 械机床设备等资金箱体使用



SUS拉丝


特征说明:

表面处理: ZOC黑色、纳米、镀铬、SUS拉丝、顺面 结构功能; 明装较强,通过螺丝固定,安装拆卸商易

HL204-2

逾:一般使用于遏讯机器机相、绝情电相、机 械机床设备等钣金额体使用

注: 透用门板厚度1-3mm




Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

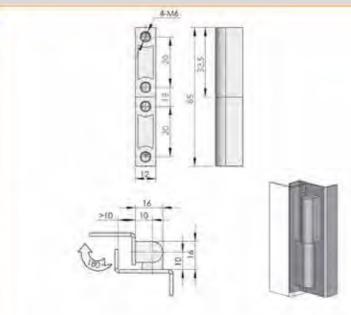

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm


Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

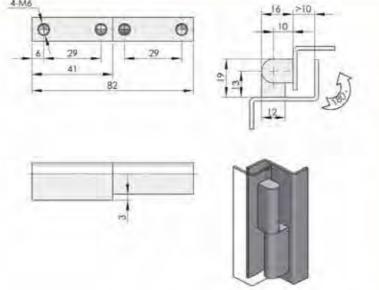

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1-3mm

地址: 广东省肇庆市高要区金利镇都播工业区 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

电话: 13929897256

特征说明:

·材 展:ZDC锌合金/SUS本锈刷

快捷方便

译: 習用门板厚度1-3mm 邮箱: 526202547@qq.com

题:一般使用于週讯机箱抗拒、电和电柜、机

SUS不锈钢

HL204-3F

表面处理。ZDC宝色、纳米、隐铬、SUS拉丝、模型

结构功能: 明晓较稳、画过螺丝圈定,安装拆卸商易

域机床设备等亚金指体使用

HL204-3

表面处理:ZDCM色、粉米、镀铬、SUS拉丝、精面

· 益何功能;明養位礎,過过增丝固定,安装拆卸而與

用 途:一般使用于通讯机销机柜。电箱电柜、机

域机床设备等资金箱体使用

→ 材 质:ZDC锌合金/SUS不惯明

读擅方便

注: 适用门板厚置1-3mm

特征说明:

李 五 锁 喜柱 锁

画

豆连 日の行 る物

板 更锁

智知 5 锁

手

dots 限 1000 CD

a 校 主链

latch 库 把

莊



OC ...

扣号 锁·s

限 dots 位员

较品 维星

> 磁图 100 元


连世

特征说明:

材 断: ZDC锌合金/SUS不锈钢 表面处理: ZDC黑色、钠米、蓝铬、SUS拉丝、幅面 适构功能: 報要校組,過过鄉公園途,安峻拆卸商易

HL205-1

途:一般使用于巡讯机局抗拒。电箱电报、抗 域机床设备等而金箱体使用

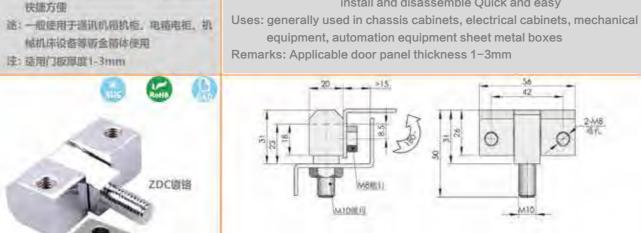



特征说明:

树 碼:ZDC锌含金/SU5不規制

法: 直接门板厚度1-3mm

表面处理 ZDC图色 - 網米、燈筒,SUS拉丝、桶面 结构功能: 與暴较疑,通过螺丝固定,安装拆的简易

途:一般使用于断讯机箱机柜、电箱电柜、机 械机床设备等级金箱体使用

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy


Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

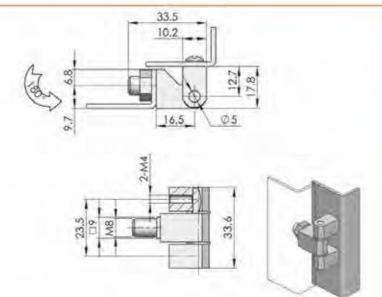


Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

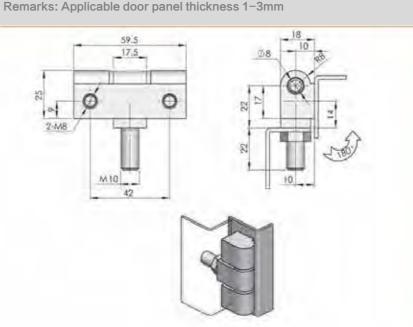

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1-3mm







李 五 锁

喜柱 是锁

面 显锁

D连 日の日 る物

板

特征说明:

· 材 順:ZDC锌合金/5US不锈钢

表面处理: ZDC黑色、脑米、顺唱、SUS拉丝、绕面

HL206-2

结构功能: 朝裝投程,通过燃丝附定,安裝拆削和息 统排方便

途:一般使用于调讯机箱机柜、电箱电柜、机 城机床设备等恒金箱体使用

备 注:适用门版厚版7-3mm



HL206-3B

表面处理:ZDC面色、奶米、喷药、SUS拉丝、桶面

· 絡构功能: 阿累拉德、通过亚拉回定、安慰折如师易

域机床设置等报金箱体使用

法: 屆用门版即度1-3mm

逾:一般使用于强讯机箱机柜。电箱电柜。机

特征说明:

材 质:ZDC锌含金/SUS不佳间

快顺方便





手

智知

を領

1000 CD

易较

库 把





李

锁

柱 锁

面

D连

る物

板

香扣

手

手具 锁星

国 lock 柱号

面

连耳 行 戦る

面等 板る (6)

搭 和高 锁·s

拉。 手. 配 dots



位员



件号

冷库把手 Handle latch 100 章

附石

HL207

特征说明:

材 演:SPCC冷板 表面处理: 個隊


结构功能:暗葉校閱、通过螺丝固定。安装拆卸局别 方便快量,则件焊接

> 途:一般使用于通讯机箱机柜。电箱电柜。机 域机床设备等级金箱体使用

注·通用门版厚度1-3mm








Feature Description:

Surface treatment: galvanize

Material: SPCC cold plate





HL208

特征说明:

材 同: ZDC符合金

表面处理: ZDC黑色、镀铂

信构功能: 請提位從,通过重丝固定,安坚拆回加易 方便快捷。制件焊接

途:一般使用于適訊机順机柜。电腦电柜。机 械机床设备等版金額体便用

注: 造用门板原度1-3mm

Feature Description:

Material: ZDC zinc alloy

Surface treatment: ZDC black, chrome plated

Structural function: Concealed ammonium chains, fixed by screws, easy

Structural function: Concealed ammonium chains, fixed by screws, easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes


Remarks: Applicable door panel thickness 1–3mm

to install and disassemble, Accessory welding

to install and disassemble, Accessory welding Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm





HL209-1

Feature Description:

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1-3mm

地址: 广东省肇庆市高要区金利镇都播工业区

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1–3mm

特征说明:


· 材 順:ZDC锌合金/5US不锈前


表面处理:ZDC湿色、脑米、铜铝、SUS拉丝、锡面

结构功能: 朝裝較甚,通过微丝耐定,安夏探即隔层 统排方便

途:一般使用于圆讯机箱机柜、电箱电柜、机 城机床设备等恒金箱体使用

着 注:适用门顺厚度7-3mm





Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

ZDC履铅 HL209-2

特征说明:

想 顶:ZDC锌合金/SUS不锈钢

表面处理:ZDC黑色、钠米、圆镜 SUS拉丝。铺面

结构功能: 明装较错,通过量丝固定,安装拆卸旅易

快速方便 选:一般使用于通讯机箱机柜、电箱电柜、机

械机床设备等级金箱体使用

注: 适用门报师度1-3mm

电话: 13929897256 邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

地址: 广东省肇庆市高要区金利镇都播工业区 电话: 13929897256 邮箱: 526202547@gg.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com 把

鲁季

- 機

で で で

喜柱

频频

画

锁

D连

西京杆

る物

漫画

- 板

点锁

香扣

ら彼

位员

拉

冷庫把 udle latch



HL209-3

特征说明:

材 质:ZDC符合金/SUS不锈钢

表面处理:ZDC黑色、韵米、情格、SUS拉丝、丽面 结构功能: 頭景校信,遇过總丝關定,安裝拆卸局易 例提方便


途:一般使用子遊訊机箱机柜。电看电柜、机 械机床设备等版金额体使用

注: 適用门整摩里1-3mm









32

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1-3mm


Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy



HL209-4

特征说明:

村 匝:ZDC锌合金/SUS不锈钢

注: 透用门板原度1-3mm

结构功能; 明義校開,通过螺丝固定,安装拆卸圆易

逾:一般使用于通讯机群机相、电精电相、机 械机床设备等钣金额体使用

Feature Description:


Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

邮箱: 526202547@gg.com 电话: 13929897256

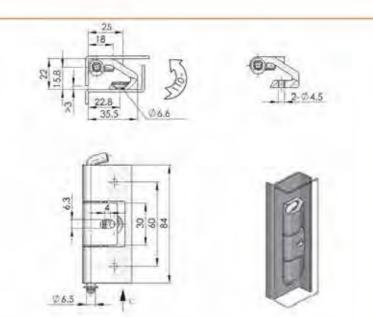


Feature Description:

Material: ZDC zinc alloy/SPCC pin Surface treatment: ZDC black, nano

Structural function: concealed ammonium chain, open and close 110° fixed by screw, pin shaft can be removed, easy and quick installation and disassembly

Uses: Generally suitable for chassis cabinets, electrical cabinets, mechanical equipment, large sheet metal boxes Remarks: Applicable door panel thickness 1-3mm

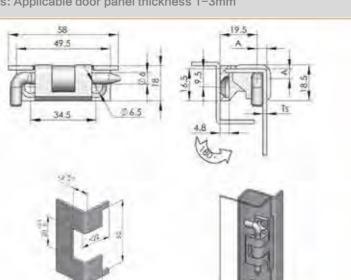



Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: concealed ammonium chain, open and close 180° fixed by screw, pin shaft can be removed, easy and quick installation and disassembly

Uses: Generally suitable for chassis cabinets, electrical cabinets, mechanical equipment, large sheet metal boxes Remarks: Applicable door panel thickness 1–3mm



HL210

特征说明:

材 质: ZDC得合金/SPCC销轴

表面处理: ZDC顺色, 始米

结构功能: 哪是铰链,开启美闭110°,通过加丝因 定、賴地可附卸, 安装拆削简易快捷

途:一般适用于机桶机柜。电箱电柜 机械设 額, 大型版金縣体使用

备 注: 选用门板厚度1-3mm








如限 1000 CD

> 品较 主链

> 库 神 把

莊

附



材 质:ZDC锌合金/SUS不锈钢

要而处理: ZDC顺色 设错。SUS拉弦、顺面

结构功能: 直接卡腊式校链,开启关闭180°、通过遗 些固定; 鸠轴可拆卸, 安装原师简易万位

HL211

途:一般适用子机精机框、电阻电相、机械设

备。大型版金和体使用

注: 适用门恆厚度1-3mm

地址: 广东省肇庆市高要区金利镇都播工业区 电话: 13929897256

邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

EYN[®]

ZDC黑色

Pande 领

> で る で の で

喜柱

频频

we lock 更 金

显锁

豆连

日の行

る物

る面

更锁

語如

を锁

板

和高

面も

较链链

N 件 件



HL212

特征说明:

材 原 ZDCW合金/SUS不锈钢

>表面处理: ZDC原色、根格、SUS拉丝、输面 >结构功能: 局等卡槽或技能,开启关闭180°、通过键

备、大型运金箱体使用

丝固定,蜗轴可探测,安装拆制而源方便 途:一般适用于机箱机柜、电箱电柜、机械设

备 注: 适用门版厚度1-3mm




HL213

特征说明:

>材 原: ZDC锌合金/SUS不锈粉
 >表面处理: ZDC脂色、镀铬、SUS拉丝、喷布
 >结构功能: 監装卡槽式校區、开启关闭180°、通过螺丝固定、锅箱可拆御、安装拆削商品方便

道:一般适用于机箱机柜、电箱电柜、机械设备、大型板金箱体使用

注: 這用门板厚度1-3mm Remarks: Applicable door




Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: concealed ammonium chain, open and close 180°, fixed by screw, pin shaft can be removed, easy and quick installation and disassembly

Uses: Generally suitable for chassis cabinets, electrical cabinets, mechanical equipment, large sheet metal boxes
Remarks: Applicable door panel thickness 1–3mm

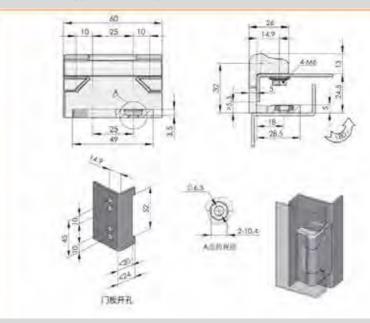


Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: concealed ammonium chain, open and close 180°, fixed by screw pin shaft can be removed, easy and

fixed by screw, pin shaft can be removed, easy and quick installation and disassembly

Uses: Generally suitable for chassis cabinets, electrical cabinets, mechanical equipment, large sheet metal boxes
Remarks: Applicable door panel thickness 1–3mm



Feature Description:

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1-3mm

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

特征说明:

ZDE镀铂

材 质:ZDC锌合金/SUS不例频

多面处理:ZDC面色、胸米、原格、SUS拉丝、响面

> 結构功能: 蝴絲铰箍,通过每丝限定,安装拆算前局 快捷方便

HL214-1

>用 進:一般使用于通讯机箱机柜、电箱电柜、机 域机床设备等镀金箱体使用

> 首: 适用门版原度1-3mm



SUS不锈钢



ZDC黑色



Hand

Door stop

Hinge

冷库把一

atch Mano

Magnet cate 图 距

Wccessorie 件



HL214-2

特征说明:

· 标 图:ZDC锌合金/SUS不锈帽

· 表而处理:ZDC黑色,纳米、眼络,SUS拉丝、福面

· 给有功能: 明裝铰链, 通过缆丝固定, 安装拆卸商易 缺强方使

· 用 途: 一般使用于海讯机箱机柜。电箱电柜。机 碱机床设备等液金糖体使用

普 注:适用门板周度1-3mm

地址:广东省肇庆市高要区金利镇都播工业区 电话: 13929897256 邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com 特征说明:

鲁季

五 锁

回

草柱 频频

面

显镜

豆连

日の行

る物

西原

智知

を領

拉

手

ない限

1000 CD

品较

主链

库 神把

斑

附

板

限 dots

位是

冷库把手 Handle latch 磁图 100 章

特征说明:

S 附石 件号

HL215

表面处理:ZDC原色、纳米、琼脂、SUS拉丝、棕面

结构功能: 超基较值,通过超丝固定,安易拆倒简易

磁机床设备等版金箱体使用

注: 透用门板顺度1-3mm

迹:一般使用于顽讯机精机柜。电脑电柜。机

材 顺:ZDC锌合金/5US不锈铜

快捷方便

5115不缔调

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

equipment, automation equipment sheet metal boxes



HL219-1

表面处理: ZDC黑色、纳米、碳倍、SUS拉盐、眼面

· 這何功能: 明装铰链,通过螺丝侧定、安装拆卸简易

械机床设备等钣金箱体使用

注: 适用门板加度1-3mm

遂:一般使用于遁讯机偏机柜。电箱电柜。机

衍 順: ZDC锌合金/SUS不透明

Feature Description:

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes


Remarks: Applicable door panel thickness 1–3mm

M6页头螺钉罩定 16 31.3



Uses: generally used in chassis cabinets, electrical cabinets, mechanical

Remarks: Applicable door panel thickness 1-3mm

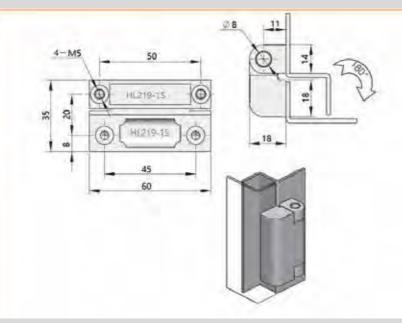

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

HL219-25 (1)

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

Feature Description:

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1–3mm

地址: 广东省肇庆市高要区金利镇都播工业区

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1-3mm




特征说明:

材 质:ZDC锌合金/SUS不例频

更而处理:ZDC简色,例来,原格,SUS初起。顺面 >括核功能: 明葵校落,通过怎丝图定,安装拆卸部局

快捷方便 用 途:一般使用于通讯机制机柜、泡箱电柜、机 域机床设备等版金箱体使用

る 注: 适用门版原度1-3mm

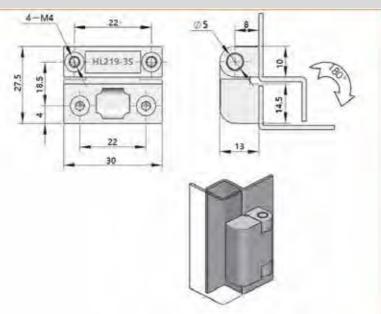

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy







特征说明:

电话: 13929897256

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

制 原:ZDC锌合金/SUS不锈脑

表面处理: ZDC漏色、熔米、镀铬、SUS拉丝、简而

给构功能: 呵装权语,通过哪些固定,安装拆卸简易

途:一般使用于過訊机精机柜、电脑电柜、机 似机砾设备等版金简体使用

注: 适用门版则进1-3mm

邮箱: 526202547@qq.com

地址:广东省肇庆市高要区金利镇都播工业区 邮箱: 526202547@gg.com 电话: 13929897256 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



ZDC順色

李 - 锁

柱

锁

画

锁

豆连

日の行

る領

で面

板

点锁

告扣

ら領

拉

手

1000 CD

品 校

王链

把

莊

吸




回るな 柱界 锁ily

平艺 面 锁点

连红 #F 00 戦る



搭 扣岩 锁us



拉至







冷库把手 Handle latch



特征说明:

特征说明:

表面处理: ZDC顺色、购米、框倍,SUS拉丝、框面 结构功能: 确樣投稿,通过塑丝固定,安裝拆卸商易

快把方便 途:一般使用于通讯机箱机柜、电新电柜、机 佩机床设备等版金箱体使用

概:ZDC综合金/SUS不锈網

HL222-1

注: 适用门板侧度1-3mm









HL222-2

表面处理: ZDC顺色、齿米、齿铃、SUS拉丝、倾弯

结何功能: 明碧校园,通过埋丝固定,安装拆卸简易

威机床设备等版金箱体使用

注: 适用门板房图1-3mm

途:一般使用子遊訊机箱机柜。車插电柜。机


初 票: ZDC锌合金/SUS不证构

Material: ZDC zinc alloy/SUS stainless steel

install and disassemble Quick and easy

equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

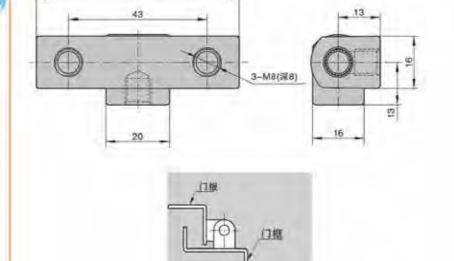


Feature Description:


Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

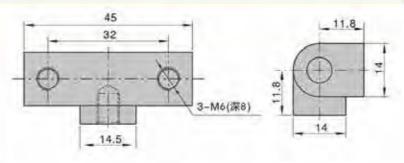




Feature Description:

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

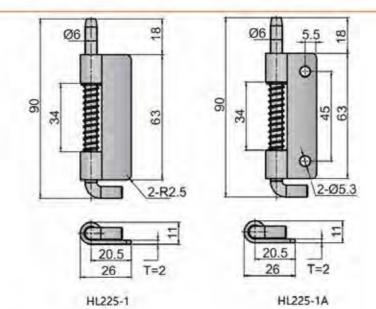

Feature Description:

Material: SPCC/SUS material

HL225-2A

Feature Description:

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS grinding

Remarks: Applicable door panel thickness 1-3mm

Surface treatment: SPCC galvanized, SUS grinding

Remarks: Applicable door panel thickness 1-3mm

Structural function: welded spring hinge, divided into left and right

directions, easy and convenient installation

Uses: Generally suitable for chassis cabinets, electrical cabinets, machine

tools, mechanical server chassis and other sheet metal boxes

HL225-1/1A

特征说明:

材 页: SPCC/SUS材质

更而处理: SPCC管辖 SUS研查

·信构功能: 焊接式弹器铰链、分左右方向、安装证机

進:一般适用机器机柜、阻箱电柜。机床机械

T=1.5 HL225-2

方便快捷 腦勞無机關聯節金翰体使用 省 注: 這用门版/// 図1-3mm



材 同: SPCC/SUS物质

特征说明:

表面处理: SPCC智持, SUS研創

· 启柯功前: 焊接式弹簧铰链, 分左右方向, 安曼消息 方便快翻

造:一般透視机箱机柜。电箱电柜。机床机械 經營器批局等協会和体使用

注: 适用门版厚度1-3mm

地址: 广东省肇庆市高要区金利镇都播工业区

Uses: Generally suitable for chassis cabinets, electrical cabinets, machine

tools, mechanical server chassis and other sheet metal boxes

directions, easy and convenient installation

Structural function: welded spring hinge, divided into left and right

电话: 13929897256 邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

地址:广东省肇庆市高要区金利镇都播工业区 邮箱: 526202547@gg.com 电话: 13929897256 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

手骨 锁星

国 lock 柱身 镇

平 面

连世 # OC ... 戦る

板元 做 2 搭

扣告

面も

锁员 拉 手

限 dots 位多

链主 冷库把手 Handle latch

较品

磁图 100 章

特征说明:

初 画: SPCC/SUS材质

裏面处理: SPCC複样, SUS研閱

附石 件号



HL225-3

特征说明:

材 期: SPCC/SUS>规则 表面处理: SPCC信仰, SUS研磨

结构功能: 伽提式弹簧铰链,分左右方向,安装简剔

方便快振

一般适用机输机柜、电箱电柜、机床机械 服务别机商等钣金箱体使用

注: 這用门板厚度1-3mm



Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS grinding

Structural function: welded spring hinge, divided into left and right directions, easy and convenient installation

Uses: Generally suitable for chassis cabinets, electrical cabinets, machine tools, mechanical server chassis and other sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm



HL225-10


结何功能: 咬链下座,通过焊接或钉孔方式安装。排

服务器机研等银金程体使用

途:一般适用机械机柜 电辐电柜 机床机制

配HL225 所谓较错使用

注: 這用门版厚度T-3mm

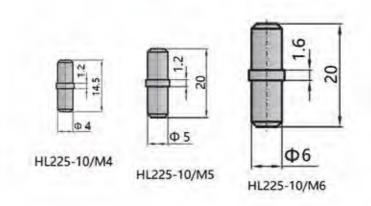

Feature Description:

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS grinding

Structural function: hinge lower seat, installed by welding or punching,

used with HL225 pin hinge

Uses: Generally suitable for chassis cabinets, electrical cabinets, machine tools, mechanical server chassis and other sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

电话: 13929897256 邮箱: 526202547@qq.com



SUS不锈钢

鲁季 五 锁

で で で

柱

锁

面 显锁

D连

西京杆

る物

西島

更锁

智力

を锁

拉

手

位

品 较

主链


把

莊

附

至手

板



Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

Feature Description:

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1–3mm

地址: 广东省肇庆市高要区金利镇都播工业区

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1-3mm



HL226-1/8

特征说明:

材 质 ZDC锌合金/SUS不例例


表面处理:ZDC無色、納米、喷箱、5US拉丝、侧面

迹:一般使用于通讯机和机柜、电箱电柜、机

签 注: 透用门板师废1-3mm

- 结构功能: 明装控链,通过继丝固定,安装拆卸商品 規維方便

柯机床设备等语金箔体使用



Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy



HL226-1A/8

特征说明:

电话: 13929897256

材 题:ZDC锌合金/SUS不锈钢

表面处理:ZDC黨色、姚米、唇锋,SUS拉丝、福阳

结构功能: 個架铰链,通过握丝固定,安装拆制圆架

途:一般使用于遊訊机報机柜 电箱电柜 机 械机环设备等级金箱体使用

注: 造用门板顺度1-3mm

邮箱: 526202547@qq.com

Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

地址:广东省肇庆市高要区金利镇都播工业区 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

李 五 锁

喜柱

锁

面

锁

D连

100年

る物

板

更锁

智知

を被

手背 锁星

回公 柱兽 顿灵

> 平艺 面 锁点

连耳 # 00 戦る

面も 板元 60

搭 和高 锁·s

拉至 手

開発 位员

较品

维星 冷库把手 Handle latch

> 磁图 100 章

附石 件号

HL226-1/6

特征说明:

材 画:ZDC符合企/SUS不锈钢 表頭处理: ZDC黑色、納米、镀钼、SUS位性、管面 结构功能: 明装较糕,通过加过周定,安装拆卸简则 快捷方便

> 途:一般使用于通讯机箱机柜、电箱电柜、机 域机床设备等语金额体使用

注:适用门版师面1-3mm



HL226-1A/6

材 面 ZDC锌合金/SUS不锈钢

特征说明:

表面处理: ZDC黑色、始米、配格、SUS拉丝、城面 任构功能: 明朝校堡,通过增益固定,安装捐卸简易

途:一般使用于週訊机箱机柜、电箱电柜、机

机机床设备等版金箱体使用 译: 這用门板即度T-3mm


Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm



Feature Description:


Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

电话: 13929897256 邮箱: 526202547@qq.com



Feature Description:

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1-3mm


地址: 广东省肇庆市高要区金利镇都播工业区

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm



特征说明:


制 原: ZDC符合金/SUS不侧桁


表面处理: ZDC黑色、蛤米、塘塘、SUS拉丝、桌面 「植构功能:峭暴较轻,通过增丝固定,安装拆御简易

HL226-2

快福方便 途:一般使用于遮讯机箱机程、电磁电柜、机 械机床设备等板金钢体使用

备 注: 选用门板厚庭1-3mm





Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

HL226-2A

特征说明:

材 原:ZDC符合金/SUS不惯胸

罗丽处理: ZDC顺色、始米、眼络,SUS拉丝、响面

结构功能: 網裝校閱,遊过鄉丝圈定,安装拆伽而島

用 途:一般使用子遊訊机箱机柜。車額电柜、机 報机床设备等版金額体使用

注: 适用门腔厚图1-3mm

电话: 13929897256 邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com





ZDC網色



a 校 主链

把

李

锁

柱

锁

面

豆连

100年

る物

板

更锁

香扣

を被

较品

链量



S







表而处理:ZDCM色、阿米、镀锡、SUS拉鱼、喷面

结构功能: 昭延校组、通过增丝固定、安装折卸而易

城机床设备等语金箱体便用

HLZ26-3A

表面处理 ZDC宣色。 語來 逻辑,SUS拉住 原面

结构功能: 喉鏡较疑,適过總丝固定,安景辨即滿景

城机床设备等版金箱体使用

注: 透用门板厚度1-3mm

途:一般使用于週訊机幅机柜。电机电柜。机

材 题:ZDC锌合金/SUS不协陷

注: 透照门顺厚度T-3mm

逾:一般使用于通讯机舶机柜、电箱电柜。机

表征方便

ZDC源色

特征说明:

SUS缬面

SUSTON


Feature Description:


Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm





Material: ZDC zinc alloy/SUS stainless steel

Feature Description:

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

电话: 13929897256 邮箱: 526202547@qq.com

HL226-4-1

Feature Description:


Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

4-M8x1.25



Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

特征说明:

特征说明:

相 原: ZDC锌合金/SUS本语明

按加方使

注: 造用门板师图1-3mm

材 源:ZDC锌合金/SU5不例期

泰面处理: ZDC颜色、纳米、圆路、SUS拉丝、随面

> 皆构功能: 眼襞较错,通过继丝围足,安装拆御简易 类體方便

途:一般使用于测讯机械机柜。电相电柜、机 域机床设备等适金给体使用

HL226-4A-1

表而处理: ZDC混色。协米、结婚,SUS拉丝、周面

后构功能: 明装较低,通过爆丝圈定,安装拆卸简易

順机床设备等版金团体使用

遊:一般使用子通讯机幅机柜。电器电柜、机

备 注: 语用门版即度1-3mm





SUS不锈钢



8 位位

> 黄铰 主链

库 章 把

斑

附

地址: 广东省肇庆市高要区金利镇都播工业区 电话: 13929897256 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

鲁季 - 锁

で で で の で

喜柱 频频

る面

語如

を領

手

品较

主链

库 把

莊


附

板

较品

链量



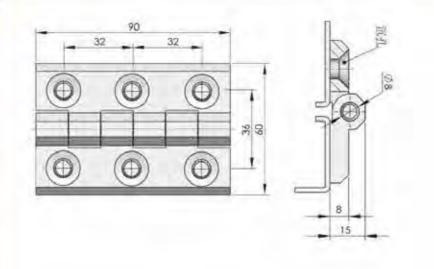

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

特征说明:

项:ZDC符合金/SUS不锈钢

表面处理 ZDC黑色、防米、镀铬、SUS拉丝 積面 结构功能: 網絡技能,通过機丝關定,安裝拆卸前期 快加方便

HL226-5

道:一般使用于通讯机能机柜。电隔电柜、机 賦訓沫從釜够而全销体使用

法: 這用门版厚屋1-3mm









ZDC镀铝

特征说明:

ZDC照色

材 履:ZDC锌合金/SUS不锈钢

还: 适用门帧则则1-3mm

表面处理: ZDC扁色、樹米、腐铬、SUS拉丝、葡萄 倍构功能: 眼蒙权程,通过哪丝固定,安装拆卸简易

HL226-5A

途:一般使用于通讯机情机相、电箱电相、机 域机床设备等版盒器体使用

Feature Description:

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel


Remarks: Applicable door panel thickness 1-3mm


Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm





画 显锁 豆连 京新 HL226-7 る物

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1-3mm


特征说明:


村 质:ZDC锌合金/SUS不惯侧

表面处理: ZDC黑色、纳米、腹相、SUS拉丝、响阻 「蓝柯功能」明裝校框,描述關金溫定,安裝拆卸箱易 快語方便

用 遊:一般使用于週讯机照机柜、电箱电柜。机 城机床设备等钣金和体使用

备 ほ: 透用门板厚度 1-3 mm





Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy



HL226-7A

特征说明:

材 库:ZDC锌合金/SUS不锈病

表面处理: ZDC關色、始米、禮籍,SUS拉丝 城市

- 结构功能:阿累较能,通过或丝固定,安累解如而易

途:一般使用于遵讯机械机柜。电轴电柜、机 标识床设备》 饭金物体使用

连: 週期门板顺函1-3mm

地址:广东省肇庆市高要区金利镇都播工业区

Remarks: Applicable door panel thickness 1-3mm

Material: ZDC zinc alloy/SUS stainless steel

Feature Description:

邮箱: 526202547@qq.com 电话: 13929897256 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

平 面

连世 #F COUNTY 戦る

面首 板石 何で

搭 扣号 锁uo

拉至 手至

限 dots

位员 较品

链量

冷库把手 Handle latch

磁图 100 章

特征说明:

附百 件号

HL230-1

特征说明:

材 断: ZDC锌合金/SUS不锈钢 表面处理: ZDC關色、順砂、SUS拉丝、傾面 适构功能: 哈勒钦翰,而过如公周定,安易拆卸部则 方便快振。附件焊接

> 途:一般使用于通讯机械机柜、用箱电柜、机 械机床设置等语金籍体使用

注: 道見门板厚照 1-3mm



HL230-4

材 原: ZOC锌合金/SUS不透铜


表面处理: ZDC關色、節砂、SUS拉丝、城區

悠构功能: 隨裝校證,通过鄉丝固定,安裝拆卸能够

似机床设备等版金额体使用

注: 适用门顺列型1-3mm

途:一般使用于谚语机物机枪。根语电枢、机

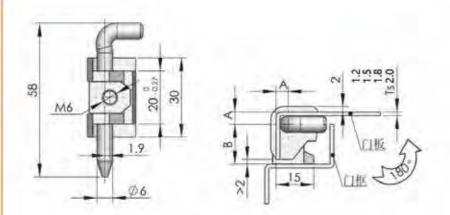


Feature Description:


Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function:concealed hinge, fixed by screws, easy and convenient installation and disassembly, accessory welding

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm






Feature Description:


Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function:concealed hinge, fixed by screws, easy and convenient installation and disassembly, accessory welding


Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

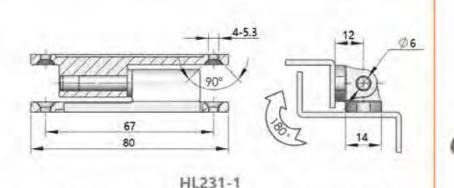


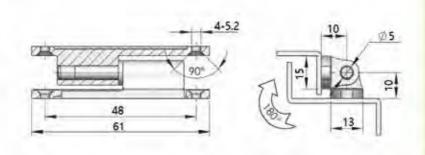

HL231-2

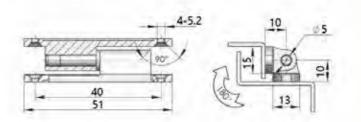

HL231-3



HL231-4

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1-3mm

特征说明:

材 质:ZDC锌合金/SUS不锈钢

ZDC镀铬

表而处理:ZDCM色、树米、圆锤 SUS拉丝、侧面 结构功能 明表较值,通过塑丝固定,安装新加高别 协造方便

HL231-4

HL231-1

HL231-2

HL231-3

途:一般使用于適訊机箱机柜。电籍电柜。机 喊机床设备等版金插体使用

邮箱: 526202547@qq.com

注: 透用门链原图1-3mm

柱 锁 面 锁

李 五 锁

Di连 阿斯特 る領

板 是锁

拉 手

品 限 1000 CD

黄铰 主链

把 手

莊

附

地址: 广东省肇庆市高要区金利镇都播工业区 邮箱: 526202547@qq.com 地址: 广东省肇庆市高要区金利镇都播工业区 电话: 13929897256 电话: 13929897256 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



李 景 锁

柱

锁

面

豆连

五五年

る額

面の

更锁

智如如

ら観

手

dots 限

Door CO

a 校

主链

latch

库 更把

手

磁

板



回公 柱兽 版 wild

面 锁是

连世 打 000 戦る

面も 板市 概言

搭 扣告 锁员

拉至 手草


图stop


位员 较品

冷库把手 Handle latch

麻 catch 服

附 件号



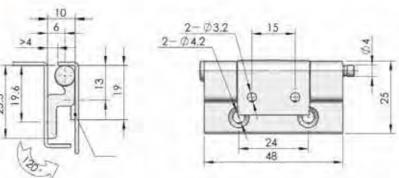

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function:concealed hinge, fixed by screws, easy and convenient

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

installation and disassembly, accessory welding

HL232

特征说明:

材 质: ZDC锌合金/SUS不锈病 表面处理:ZDC黑色、喷砂、SUS拉丝、帽面 。结构功能:趙蒙校礎、遜过螺丝固定,支裝將部間易 方便快捷。刚件焊接

> 途:一般使用于適訊机箱机柜。电看电柜、机 械机床设备等版金箱体使用

注: 适用门临项屋1-3mm



HL233-2/65

特征说明:

材 圖 ZDC锌合金/SUS不锈糊

注: 适用门被厚度1-3mm

表面处理- ZDC侧色、剪米、侧铬、SUS拉丝、侧面 结构功能。明装较链,通过雌丝圆冠,安装拆卸简易

途:一般使用于追訊机箱机柜。 电辐电柜。机 机机床设备等版金箱体使用

Feature Description:

6-07

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1-3mm

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

电话: 13929897256

沉孔 13x45°

012.5 (38.1) \$17.5



HL233-1/80

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm


特征说明:

材 质:ZDC锌合金/SUS不惯明

表面处理:ZDC黑色、铂米、镀铬、SUS拉丝、桶面 · 益何功能:明禮拉链,過过增丝固定,安装拆卸而與 读禮方便

途:一般使用于通讯机用机柜。电箱电柜、机 域机床设备等资金箱体使用

注: 适用门板厚置1-3mm

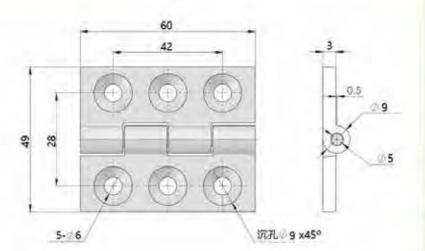

HL233-3

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1-3mm

特征说明:

材 摄: ZDC锌合金/SUS不锈帽

表而处理: ZDC黑色、纳米、螺络、SUS拉丝、肩面

给梅功能:明装铰链,通过螺丝固定,安装拆卸简易 快速方便

逾:一般使用于通讯机箱机枪、电箱电柜、机 城扎床设备等版金稽体使用

注: 透用门板圆度1-3mm

邮箱: 526202547@qq.com

地址: 广东省肇庆市高要区金利镇都播工业区 地址: 广东省肇庆市高要区金利镇都播工业区 电话: 13929897256 邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



李

声 機

のなり回

喜柱 频频

面 显镜

D连 西京杆

る物

设面

一板

点锁

200 和

ら戦

手

dote 限

Door CO

易较

主链

章 把

莊

吸

附

手音 御皇

国 Pock 柱界 锁的

平艺 面

连手 打 000 戦る

> 面当 板市

搭 和智

拉 手

限 dots 位品

> 链量 冷库把手 Handle latch

磁艺 服音

件员

概言

较品

特征说明: 材 质:SUS不透钢 表面处理: SUS拉丝 画面 结构功能: 明美校链,通过建丝固定,安美拆卸加易

特征说明: 粉 厦: SUS不锈钢

表面处理:SUS拉丝、顺面

链构功能: 順裝投籍,過过塑丝固定,安装拆卸前身

HL233-4/75

造 一般使用于顺讯机箱机柜、电箱电柜、机 械机床设备等版金箱体使用

注: 不受门被厚度房制







途: 一般使用于逼讯机械机柜、电箱电柜、机

械机床设备等版金相体使用

注:不受门极刚度限制


Feature Description:

Material: SUS stainless steel

Structural function: exposed ammonium chain, fixed by screws, easy to

equipment, automation equipment sheet metal boxes

Remarks: Not limited by door panel thickness

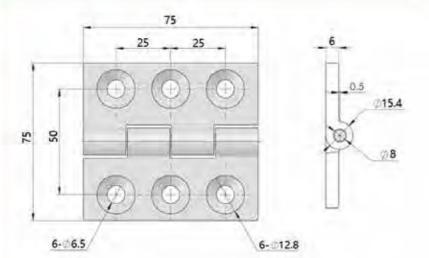

Feature Description:


Material: SUS stainless steel

Surface treatment: SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Not limited by door panel thickness

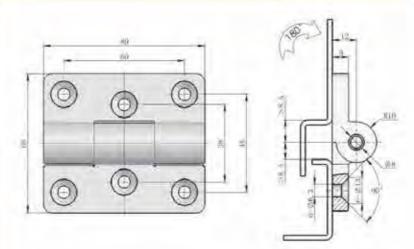

Surface treatment: SUS wire drawing, mirror

install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

215.4 8 8 6-06.5

100



特征说明:

材 题:SUS不透钢

表面处理: SUS拉丝、简面

结构功能: 阅读较低,通过超过周定,安装拆卸简剔

途:一般使用于資訊机箱机柜。車看柜柜、机 械训床设备等仮金箱体使用

管 注: 不受门板闸匝限制

@15.4 6- 12.8

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

HL233-75

Material: SUS stainless steel

Feature Description:

Feature Description:

Material: SUS stainless steel

Surface treatment: SUS wire drawing, mirror

Remarks: Not limited by door panel thickness

Surface treatment: SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Not limited by door panel thickness

地址: 广东省肇庆市高要区金利镇都播工业区

特征说明:

· 材 圆:SUS不模钢

表面处理: SUS拉丝、肩面

情构功能: 明装铰链、通过增丝固定,安装拆卸简易

過:一般使用子週訊机箱机柜。堪箱电柜。机

械机床设备等质金箱体使用

注: 不受门板顺度阻制

电话: 13929897256 邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



特征说明:

鲁季

- 機

のなり回

画 锁

る面

点锁

香扣

ら領

板



回公 柱兽 锁 like

面

连trong # OC 戦る

面首 板っ 概言

搭 和岩 锁·s

拉 手.

位 8 较品

链量

图 dots

冷库把手 Handle latch

磁图 100 章

特征说明:

树 质: ZDC锌合金

表面处理:ZDC開色、剪米、週間

附百 件号



HL234-1

表面处理:ZDC加色,始米、镀铬,SUS拉丝、喷雨

括构功能: 超基效能,通过现金固定,安装拆制部制


侧机床设备等钣金箱体使用

注: 造用门板厚度1-3mm

遊:一般使用于適讯机順机柜。电精电柜。机

材质:ZDC符合金/SUS不例例

快捷方便

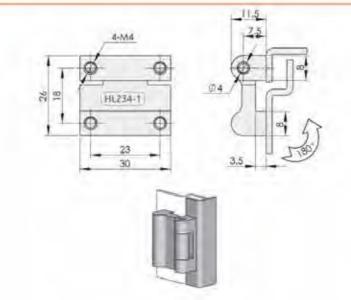

Feature Description:


Material: ZDC zinc alloy/SUS stainless steel


Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm





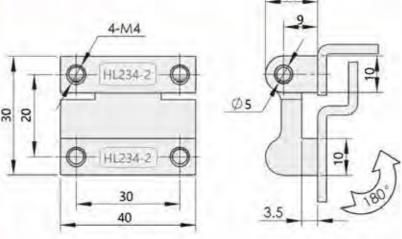

HL234-2

结构功能: 明装技能,通过理丝颜定,安装折卸规则

机机床设置导版金额体使用

注: 选现门版即设1-3mm

途:一般使用于疆讯机验机柜、电精电柜、机

地址: 广东省肇庆市高要区金利镇都播工业区

Feature Description:

Material: ZDC zinc alloy

Surface treatment: ZDC black, nano, chrome plated

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

邮箱: 526202547@gg.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

电话: 13929897256

4-M5 Ø5

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

Feature Description:

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: Structural function: concealed hinge, fixed by screws,

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

accessory welding

Remarks: Applicable door panel thickness 1-3mm


地址: 广东省肇庆市高要区金利镇都播工业区

easy and convenient installation and disassembly,

Surface treatment: ZDC black, nano, chrome plated

Remarks: Applicable door panel thickness 1-3mm

Material: ZDC zinc alloy



焊接或焊柱螺钉固定



喜柱 频频

HL234-3

D连 西京杆 る物

特征说明:

· 村 版: ZDC锌合金

表而处理: ZDC關色 转米 價值

- 结构功能: 組織较能,通过超丝固定,安装振励能易 快振方便

途:一般使用于巡讯机员机柜、电局电柜、机 域机床设备等级金融体使用

注: 透用门版厚层1-3mm





ZDC链镍



手 如限

1000 CD

品 较

库 神 把

莊

吸 附

特征说明:

材 圆: 2DC锌合金/5US不结构

表面处理: ZDCM色、遍砂、SUS拉丝、模面

结构功能; 磷炭较佳,通过爆丝固定,安装拆卸简易

HL237-1

万便茂建。附件厚层

途:一般使用于调讯机箱机柜。电量电柜、机 域机床设备等钣金额体使用

注: 透用门版原度1-3mm

电话: 13929897256

鲁季 景 锁

1000

喜柱

Cytion

面 品 锁

Di连

五多杯

及锁

で面

回板

豆锁

四四四

ら彼

鲁拉

至手

dots 限

Door (I)

品较

主链

较品

链宝

附石 件号













HL238-1





SPCC镀锌

HL238-2



HL238-3

特征说明:

材 周: SPCC/SUS材质


表面处理: SPCC證券, SUS拉丝


注:适用门帧则则1-3mm


信有功能: 阿装权证,通过哪些固定,安装拆卸简易


逾:一般使用子適訊机商机相,电箱电相。机 域机床设备等振盒額体使用

地址: 广东省肇庆市高要区金利镇都播工业区









Feature Description:

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS brushed


Structural function: Structural function: concealed hinge, fixed by screws, easy and convenient installation and disassembly,


accessory welding


Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

电话: 13929897256 邮箱: 526202547@gg.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



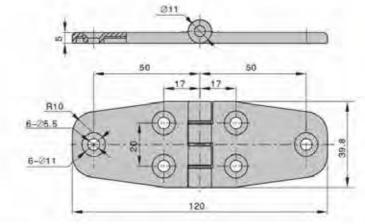



Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical


equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1-3mm

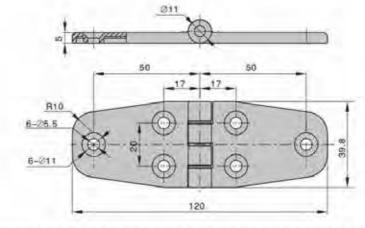

特征说明:

材 质: ZDC锌合金/SUS不锈链

表面处理: ZOCM色、纳米、缆铬、SUS拉丝、顺面

结构功能: 眼裝較輕,逼过雪丝固定,安裝拆卸貿易

用 途:一般使用于通讯机路机柜、电脑电框、机 械机床设备等钣金箱体使用

注: 适用门恆厚度1-3mm

邮箱: 526202547@qq.com

电话: 13929897256 地址: 广东省肇庆市高要区金利镇都播工业区 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



SUS不锈钢

HL238-4





SUS不锈钢

HL238-5





ZDC锌合金

HL238-6

冷库把一

至手

斑



鲁季

三锁

で で で の で

喜柱

是锁

画

豆连

西京杆

る物

板

点锁

香扣

を锁

手

如限

品 较

主链

手音 锁星

回公 柱号

面

连世 # OC ... 製品

面首 板市 概る

搭 和高 锁员

拉 手

限 dots 位员

较品

链主

冷库把手 Handle latch

磁图 服 岩 S

件号

特征说明: 初 斯:ZDC符合金

> 表而处理: ZDC加色、原米 结构功能: 明显较强,通过现丝固定,安装折卸消息 表提方便

逾:一般使用于通讯机舶机柜、电箱电柜。机 城机床设备等版金箱体便用

HL239-1

注: 透照门顺厚度T-3mm







HL239-2

特征说明:


版 ZDC锌合金 表而处理;ZDC黑色。倘米


结构功能: 胡裝铰链、圆过鲱丝磨定、安装拆卸施剔

途:一般使用子通讯机箱机柜。电箱电柜。机 福机床设置等镀金箱体使用

法 這用门版厚度1-3mm







Feature Description:

Material: ZDC zinc alloy


Surface treatment: ZDC black, nano


Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy


Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm









Feature Description:

Material: ZDC zinc alloy


Surface treatment: ZDC black, nano


Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

电话: 13929897256 邮箱: 526202547@gg.com





Surface treatment: ZDC black, nano, chrome plated

Remarks: Applicable door panel thickness 1-3mm

Feature Description:


Feature Description:

Surface treatment: ZDC black, nano, chrome plated

Remarks: Applicable door panel thickness 1-3mm

Material: ZDC zinc alloy

Material: ZDC zinc alloy







HL240-1

材 周: ZDC样合金

特征说明:


ZDC順色

夏阅处理: ZDC顺色 始米 根垫

> 鐵梅功能:與裝較變,通过鐵丝固定,安慰拆卸簡易 快栅方便

途:一般使用于追讯机箱机柜。电脑电柜。机 域机床设备等设金箱体使用

着 注: 适用门版厚度1-3mm




Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy




Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy





HL240-2

特征说明:

初 直:ZDC锌合金

表面处理: ZDCM色、购米、遗悟

结构功能: 阴囊设值,通过增丝固定,安蒙指如而易 表提方便

途:一般使用于遵讯机箱机柜。电知电柜 机 戰机床设备等從金額依使用

注: 适用门版厚度1-3mm

地址: 广东省肇庆市高要区金利镇都播工业区 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

莊

库 神 把

吸



手具 锁星

国 lock 柱粤

平艺 面

连红 打 000 戦る

面も 板市 概言

搭 和智 锁·s

拉 手

较品

冷庫把 udle latch

磁图 100 元

附旧 件号

特征说明:

村 顺: ZDC評合金/SUS不锈钢

快振方便

限 dots 位

ZDC镍铬 ZDC關色 HL240-3

表面处理:ZDC黑色、的米、蜡格、SUS拉丝、圆面

选和功能: 服装铰链、通过螺丝固定,安装折卸简易

械机床设备等被全脑体使用

注: 选用门板原度1-3mm

道:"一般使用于通讯机箱机柜、电箱电柜、机


Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

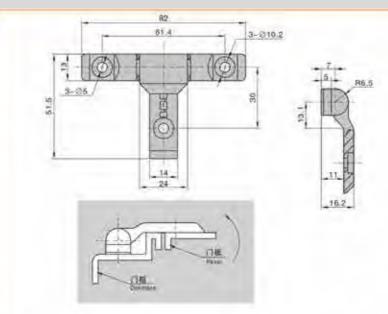

特征说明:

树 质: ZDC锌含金

道:一脸使用于通讯机相机柜。用箱电柜。机

地址: 广东省肇庆市高要区金利镇都播工业区

划机床设备等级金额体使用

注: 這用门版原度 I-3mm

HL243-1

表面处理:ZDC顺色、给米、顺程 Surface treatment: ZDC black, nano, chrome plated

· 信柯功能:坦益校復,通过螺丝删定,安装拆卸筒剔 Structural function: exposed ammonium chain, fixed by screws, easy to


Feature Description:

Material: ZDC zinc alloy

install and disassemble Quick and easy Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

电话: 13929897256 邮箱: 526202547@gg.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

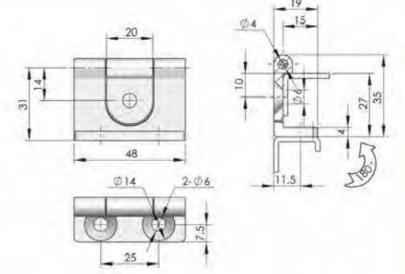

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

Feature Description:

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1-3mm

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

Structural function:concealed hinge, fixed by screws, easy and convenient


installation and disassembly, accessory welding

Surface treatment: ZDC black, nano, chrome plated

Remarks: Applicable door panel thickness 1-3mm

4-044

Material: ZDC zinc alloy

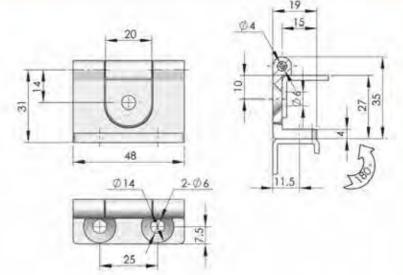





HL247



鲁季

- 锁

が 回

草柱 频频

西京杆 る物

漫画

点锁

告扣

板

特征说明:

·材质: ZDC锌合金

麦面处理: ZDC黑色、钠米、镀铬

· 括钩功能: 据受较强,通过避仓阻定,安据拆卸师师 快振方便

途:一般使用于通讯机植机柜。电箱电柜。机

域机床设备等医金额体使用

> 备 注: 适用门板厚图1-3mm







8 校

特征说明:

材 员: ZDC综合金/SUS不锈钢

表面处理:ZOC加色、刨米、镀铬、SUS拉丝、镀面

HL247-2

- 植构功制: 雪葉校镇,通过10年全国港,安装拆卸阶易

快加方便

逾:一般使用于通讯机精机柜、电贴电柜。机 植机床设备等钣金和体使用

注: 适用门版厚度T-3mm

手

位

章 把

斑

特征说明:

厦: SPCC/SUS两种材质

透构功能: 島坡校镇, 孤过焊接圆定安装, 升启角度

备, 自动化设备调金箱体使用

造:一般使用于机箱抓柜、电箱电柜、机械设

表面处理: SPCC银锌、SUS本色

回答 柱号

面

连世 打 000 戦る

板市 概言 搭

面も

和言 锁b 拉至

位员

手草



磁思 100 元

特征说明:

材 质: SPCC/SUS两种钴质


表面处理: SPCC關幹, SUS本色

注: 适用门扳厚度1-3mm

冷库把手 Handle latch

附石 件号

HL249

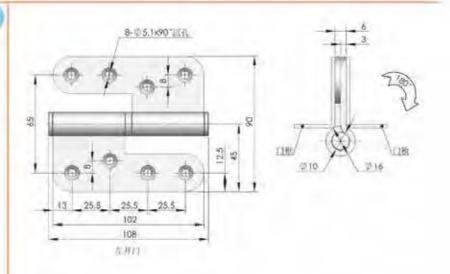

Feature Description:

Material: SPCC/SUS two materials

Surface treatment: SPCC galvanized, SUS natural color

Structural function: concealed ammonium chain, fixed installation by welding, opening angle 180°

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm





值相功能: 暗禁铰链, 通过焊接圈定安装, 开启角度

篇。自动化设备钣金额体使用

途:一般使用于机箱机柜。电和电柜、机械设

Feature Description:

Material: SPCC/SUS two materials

Surface treatment: SPCC galvanized, SUS natural color

Structural function: concealed ammonium chain, fixed installation by

welding, opening angle 120°

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

040/11PME/ 05 2:065

Feature Description:

Feature Description:

Material: SPCC/SUS two materials

Surface treatment: SPCC galvanized, SUS natural color

Remarks: Applicable door panel thickness 1-3mm

Structural function: concealed ammonium chain, fixed installation by

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

welding, opening angle 120°

equipment, automation equipment sheet metal boxes

Material: SPCC/SUS two materials

Surface treatment: SPCC galvanized, SUS natural color

Remarks: Applicable door panel thickness 1-3mm

Structural function: concealed ammonium chain, fixed installation by

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

welding, opening angle 120°

equipment, automation equipment sheet metal boxes





る物

る面

是锁

る扣

板

李


。皆构功能: 暗蒙较错,通过焊接固定安装,开启角度 120°

迹: 一般使用于机箱机柜。电箱电柜、机械设

特征说明: 被 底: SPCC/SUS兩种材质 表面处理: SPCC镍锌、SUS本色

新。自动化设备嵌金额体使用

注: 适用门板厚屋1-3mm

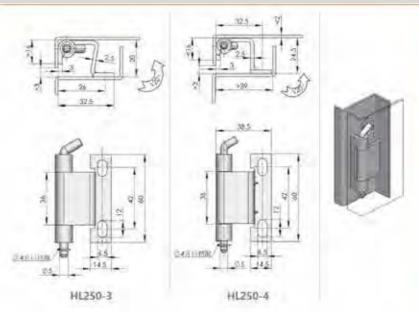



材 质: SPCC/SUS两种材质

表面处理: SPCC關粹、SUS本色

注: 适用门板厚度1-3mm

·结构功能: 網裝校楷,通过即接關定安裝。开启角度

着,自动化设备运金箱体使用

途:一般使用于机和机柜、电箱电柜、机械设

特征说明:



主链

莊 吸

附

邮箱: 526202547@qq.com

鲁季 五 锁

回

喜柱

频频

画 品級

豆连

西京杆

る領

西原

更锁

語如

を領

手

ない限

1000 CD

品较

主链

latch 库 Purple lat

至手

莊

附

板

S 附百 件号

锁 Silva

Och

板百 做a

较品 链量

冷库把手 Handle latch

HL251-1



HL251-2



HL251-3

特征说明:

初 原:ZDC锌合金/5US不透明

注; 适用门饭厚度3-3mm

表而处理: ZDCM色、损米、信息 SUS拉丝、调面 ·结构功能 : 明表校但,被过些丝固定,安装将即而别

途:一般使用于透讯机器机柜、电看弯作。机 城机床设备等版金超体使用

Feature Description:

2.1

2.9

55

2.6

3 48

Material: ZDC zinc alloy/SUS stainless steel

30.4

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

0

(1)

0


1

0

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

120 80 75

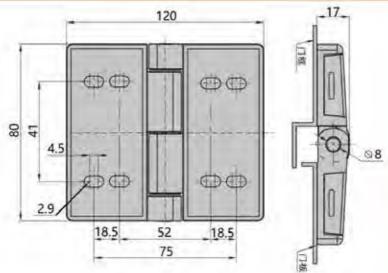


Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy





特征说明:

材 圆:ZDC锌合金/SUS不例期


表面处理: ZDC丽色、纳米、圆路,SUS拉丝、硕面 送梅功能: 昭裝校區,遂过鄉致風足,安裝拆動結局

快體方便 途:一般使用于通讯机响机柜。电响电柜。机

域机球设备等适金给体使用

首 注: 语用门版即度1-3mm

4-Ø5.5 Ø10.5x90*0EH

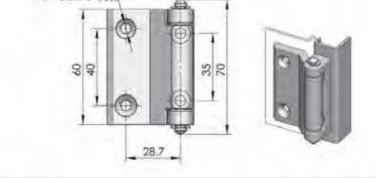

Feature Description:

Feature Description:

Material: ZDC zinc alloy/SUS stainless steel

Remarks: Applicable door panel thickness 1-3mm

Material: ZDC zinc alloy/SUS stainless steel

地址: 广东省肇庆市高要区金利镇都播工业区

Surface treatment: ZDC black, nano, chrome plated, SUS wire drawing, mirror Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1-3mm



特征说明:

电话: 13929897256

想 题: ZDC锌合金/SUS本语期

表面处理:ZDC层色。始米、结婚,SUS拉丝。周面

后构功能: 明装校府,而位端丝删定,安装拆卸简易 使擅方使

选:一般使用于通讯机能机构。电器电柜、机 侧机球设备等板金钢体使用

注: 造用门板师图1-3mm

邮箱: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

地址:广东省肇庆市高要区金利镇都播工业区 邮箱: 526202547@gg.com 电话: 13929897256 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com



手骨 锁星

国 lock 柱号 锁的

平艺 面 锁点

连中 打 03 戦る

面も 板元 随 a 特征说明:

材 质: SPCC/SUS材质

表面处理: SPCC競锌, SUS拉丝

快振芳便

结构功值: 眼袋较轻,避过悬丝围起,安装拆部制料

械机床设备等级金箱体使用

途:一般使用于遵讯机输机相、电箱电柜、机

搭 扣言 锁·s

拉至 手

限 dots

位员



冷库把手 Handle latch 磁品

> 100 元 附石

件号

SPCC镀锌



4-05.2 8x90°(元孔)

Feature Description:

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS brushed


Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm



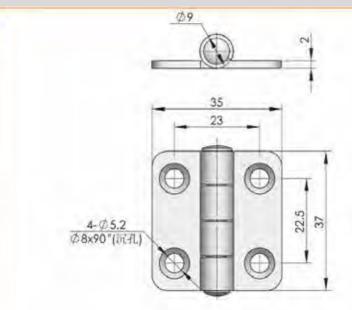

特征说明:

材 原: SPCC/SUS材质

表面处理: SPCC信持, SUS拉丝

-结构功能: 陶装铰链,通过螺丝圈定,安装拆卸商别

途:一般使用于面积机构机柜。电辐电柜。机 碱机床设备等级全链体使用

地址: 广东省肇庆市高要区金利镇都播工业区

注: 适用门板原或1-3mm

Feature Description:

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS brushed

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

电话: 13929897256 邮箱: 526202547@gg.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

Feature Description:

Material: SPCC/SUS material

电话: 13929897256

注: 證用门按师童1-3mm



五 锁 が 回 柱 锁 英 平

李

D连 西京杆 る額

板

点锁

品加

ら観

面

显镜

特征说明:

村 固: SPEC/SUS材拠

表面处理: SPCC键锌, SUS拉丝

结构功能: 明裝较樹,派性繼丝創定,安裝拆卸兩別 快捷方便

途:一般使用于测讯机箱机柜、电箱电柜、机 加机床设备等沥金箱体使用

音 注: 适用门板厚度1-3mm

SUS不锈铜

特征说明:



HL253-3

语构功能: 相談接続,通过課丝勘定,安裝併即如果

用途:一般使用子源讯机箱机柜。电箱电柜、机

械机床设备要钣金箱体便用






位

品较 主链

把

莊 吸

附



Remarks: Applicable door panel thickness 1-3mm

Surface treatment: SPCC galvanized, SUS brushed

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

3-\$5.4

Feature Description:

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS brushed

Remarks: Applicable door panel thickness 1–3mm

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

材 质 SPCC/SUS材质

表面处理:SPCC語锌。SUS拉丝





李

柱

锁

面

豆连

100年

習物

での

点锁

智知

を锁

手

故限

1000 CD

品较

主链


板

- 锁



HL253-4



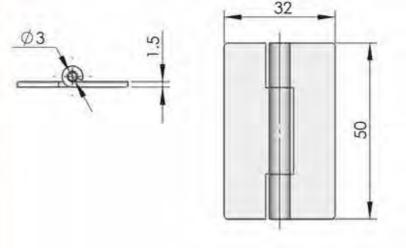



材 期: SPCC/SUSNI類 表而处理: SPCC管理, SUS拉丝

结构功能: 朗斐校提、通过细丝固定,安装折卸流息

恢振方便 逾:一般使用于週讯机箱机柜。电箱电柜。机

赋机床设备等语金箱体便用 注: 透照门顺厚度1-3mm



手

#F 00

戦る

面も

板元

概 2

搭

和高

锁uo

限 dots 位员

较品 链宝

冷库把手 Handle latch 展 catch

100 章

附百 件号





特征说明:

材 质: SPCC/SUS材质

· 表面处理: SPCC眼锌,SUS拉丝 (结构功能) 明要较佳,而过建丝固定,安装拆如而暴

沉孔 无沉孔

SUS304

HL253-4A

地址: 广东省肇庆市高要区金利镇都播工业区

途:一般使用于避讯机箱机柜、电脑电柜、机 域机床设备等版金箱体使用 注: 适用门板哪里1-3mm

Feature Description:

Material: SPCC/SUS material


Surface treatment: SPCC galvanized, SUS brushed

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

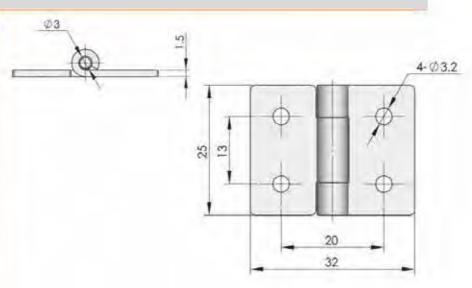

Feature Description:

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS brushed

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

电话: 13929897256 邮箱: 526202547@gg.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

0 0 0

3-05.4






· 制 版: SPCC/SUS材度

- 這构功能:銀裝校組,通过螺丝固定。 安裝折卸而易

途:一般使用于逝讯机阻抗柜、电箱电柜。抗

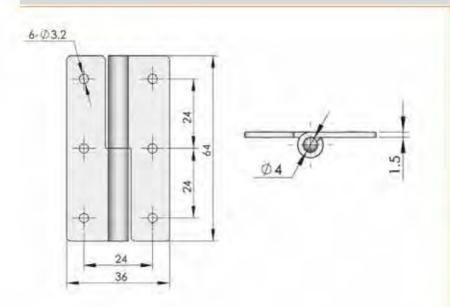

Structural function: exposed ammonium chain, fixed by screws, easy to

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes

install and disassemble Quick and easy

Feature Description:

Feature Description:

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS brushed

Remarks: Applicable door panel thickness 1-3mm

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS brushed

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1-3mm

地址: 广东省肇庆市高要区金利镇都播工业区

表面处理: SPCC關鍵, SUS拉丝

快振方便

城机床设备等初金箱体使用

注: 选用门板厚度 1-3mm



把

莊 吸

用 治:一般使用子追訊机箱机柜。电箱电柜、机 械机床设备等垢金箱体使用 还: 适用门板厚度1-3mm

特征说明:

材 简: SPCC/SUS材质

表面处理: SPCC燃料, SUS拉拉

情构功能。明装较盛,通过继丝固定,安装拆卸简易

음족 - 镇

で 回

喜柱

(yillor 锁

画

锁

豆连

日の行

及锁

漫画

っ板

是锁

語如

を領

手

20 限

1000 CD

黄铰

主链

库 把

和智

附石 件号

较品 维星 冷库把手 Handle latch

特征说明:

材 值: SPCC/SUS材面

表而处理: SPCC信持, 5US拉台

快提方使









HL253-6-1



HL253-6-2



HL253-6-3

结构功能: 明装较错,通过增丝原定,安装拆卸输剔

磁机床设置等镀金箱体使用

注 這用门板厚度1-3mm

途:一般使用于通讯机箱机柜、电箱电柜、机

Feature Description:

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS brushed

26

40

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

电话: 13929897256 邮箱: 526202547@gg.com Ø 3.5

Feature Description:

Material: SPCC/SUS material


Surface treatment: SPCC galvanized, SUS brushed

Structural function: exposed ammonium chain, fixed by screws, easy to install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical

equipment, automation equipment sheet metal boxes Remarks: Applicable door panel thickness 1-3mm



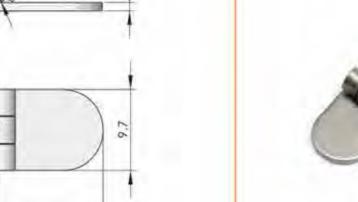

HL253-10

HL253-9

· 运物功能:明建校部,适过细丝固定,安泉折卸简易

域机床设备等版金箱体使用

逾:一般使用于週讯机幅机柜。电相电柜。机

特征说明:

初 版: SPCC/SUS物质

表面处理: SPCC链锌, SUS拉丝

疾描方便

Feature Description:

Material: SPCC/SUS material

Surface treatment: SPCC galvanized, SUS brushed

12.7

Structural function: exposed ammonium chain, fixed by screws, easy to

install and disassemble Quick and easy

Uses: generally used in chassis cabinets, electrical cabinets, mechanical equipment, automation equipment sheet metal boxes

Remarks: Applicable door panel thickness 1–3mm

25.4

特征说明:

材 页: SPCC/SUS材质

表面处理: SPCC程序, SUS拉丝

结构功能: 明碧璇亚即接铰链: 开关角度180°。体积

用 途:一般使用于通讯机量机相,电管电柜、机

城机床设备等钣金额体便用

注: 适用门板厚面1-3mm

电话: 13929897256 邮箱: 526202547@qq.com

地址: 广东省肇庆市高要区金利镇都播工业区 地址: 广东省肇庆市高要区金利镇都播工业区 Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com Add: Dubo Industrial Zone, Jinli Town, Gaoyao District, Zhaoqing City, Guangdong Province TEL: 13929897256 Email: 526202547@qq.com

吸

莊